


# Mixergy X

## Installation & Servicing instructions

For stainless steel hot water cylinders

2.0 Controller

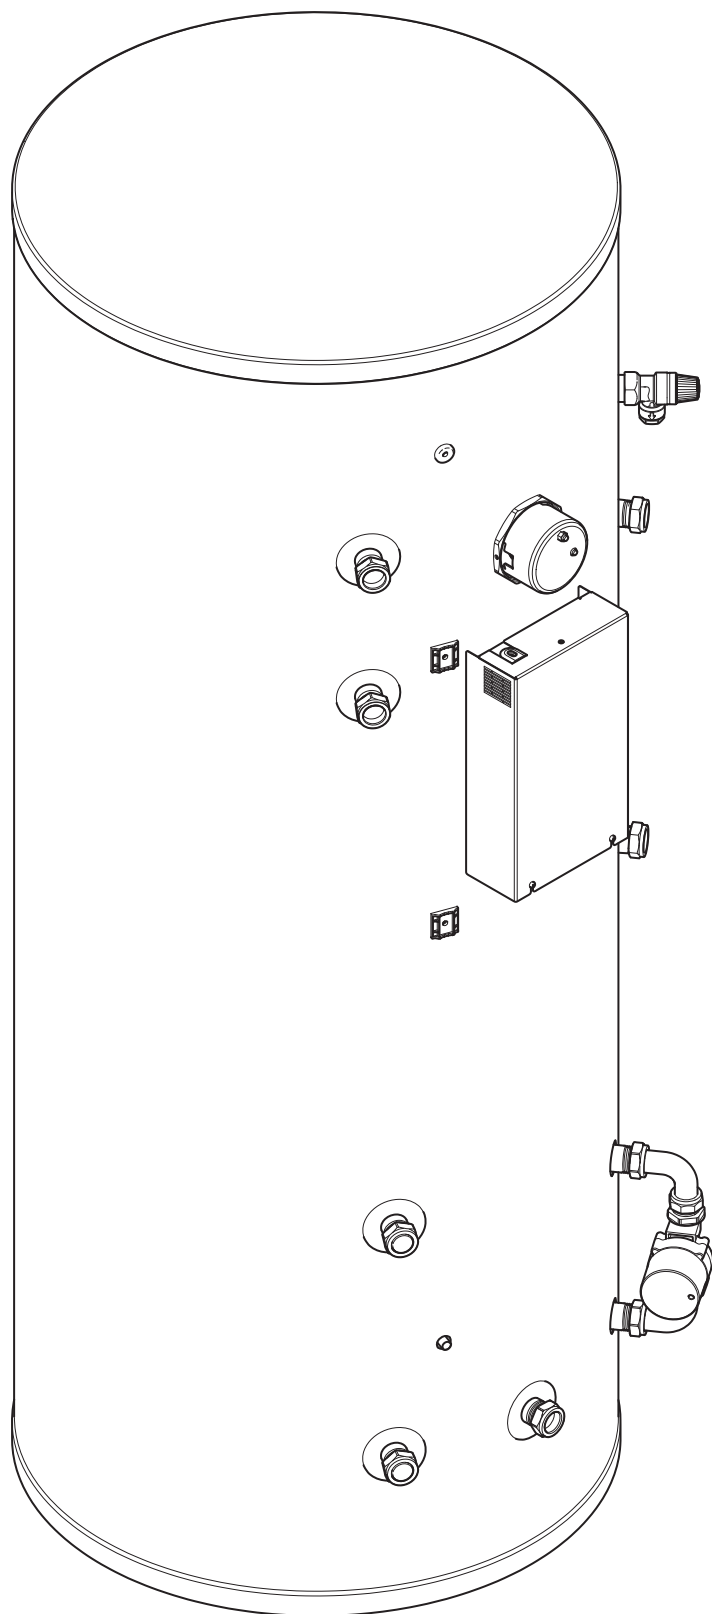

**kiwa**



**hot water  
association**



### PLEASE LEAVE WITH HOUSEHOLDER

Failure to install and maintain this system in accordance with these instructions will invalidate the manufacturer's warranty.

**mixergy**<sup>®</sup>

# Contents

|             |                                                                              |           |
|-------------|------------------------------------------------------------------------------|-----------|
| <b>1.0</b>  | <b>Cylinder details - MX number</b>                                          | <b>5</b>  |
| <b>2.0</b>  | <b>Technical data</b>                                                        | <b>5</b>  |
| <b>3.0</b>  | <b>Safety</b>                                                                | <b>6</b>  |
| <b>4.0</b>  | <b>Performance</b>                                                           | <b>7</b>  |
| <b>5.0</b>  | <b>Additional components</b>                                                 | <b>9</b>  |
| <b>6.0</b>  | <b>Design notes</b>                                                          | <b>10</b> |
| <b>7.0</b>  | <b>Schematic: Indirect</b>                                                   | <b>11</b> |
| <b>8.0</b>  | <b>Schematic: Direct</b>                                                     | <b>12</b> |
| <b>9.0</b>  | <b>Hydraulic schematics</b>                                                  | <b>13</b> |
| 9.1         | Direct unvented                                                              | 13        |
| 9.2         | Indirect unvented                                                            | 13        |
| <b>10.0</b> | <b>Installation: general guidelines</b>                                      | <b>14</b> |
| 10.1        | Positioning of the cylinder                                                  | 14        |
| 10.2        | Unvented installations                                                       | 15        |
| 10.3        | Pipework and cold water inlet control group                                  | 15        |
| 10.4        | Fitting a drain valve                                                        | 15        |
| 10.5        | Positioning the tundish                                                      | 16        |
| 10.6        | Checking the pump and T&P relief valve                                       | 16        |
| 10.7        | Fitting the expansion vessel                                                 | 16        |
| <b>11.0</b> | <b>Discharge pipework</b>                                                    | <b>17</b> |
| 11.1        | Discharge pipes from safety devices                                          | 17        |
| 11.2        | Tundish                                                                      | 17        |
| 11.3        | Typical discharge pipe arrangement                                           | 17        |
| 11.4        | Sizing of discharge pipe D2 for common temperature relief valve outlet sizes | 18        |

# Contents

|             |                                              |           |
|-------------|----------------------------------------------|-----------|
| 11.5        | Discharge pipe D2                            | 18        |
| 11.6        | Termination of discharge pipe                | 19        |
| <b>12.0</b> | <b>Installation: electrical</b>              | <b>20</b> |
| 12.1        | Accessing the controller                     | 20        |
| 12.2        | Fitting the gauge                            | 20        |
| 12.3        | General guidelines                           | 21        |
| 12.4        | Strain relief                                | 21        |
| 12.5        | Indirect units and electrical wiring         | 21        |
| 12.6        | Wiring diagram - Indirect                    | 22        |
| 12.7        | Wiring diagram - Direct                      | 22        |
| <b>13.0</b> | <b>Installation: connectivity</b>            | <b>24</b> |
| 13.1        | Connectivity                                 | 24        |
| 13.2        | Supporting a homeowner or resident at set up | 24        |
| <b>14.0</b> | <b>Commissioning</b>                         | <b>25</b> |
| 14.1        | Access the controller                        | 26        |
| 14.2        | Connect peripherals                          | 26        |
| 14.3        | Power and check status                       | 27        |
| 14.4        | Changing heat sources                        | 28        |
| 14.5        | Self-test troubleshooting                    | 28        |
| 14.6        | Replace lid                                  | 28        |
| 14.7        | Commissioning checklist                      | 29        |
| <b>15.0</b> | <b>Problem solving</b>                       | <b>31</b> |
| 15.1        | Overheated water                             | 31        |
| 15.2        | Water discharge                              | 31        |
| 15.3        | Electrical fault                             | 31        |

# Contents

|             |                                        |           |
|-------------|----------------------------------------|-----------|
| 15.4        | Connectivity issues                    | 31        |
| 15.5        | Expansion vessel check and re-charging | 31        |
| 15.6        | Safety valves                          | 31        |
| 15.7        | Fault code table                       | 32        |
| 15.8        | No PWR ON LED                          | 33        |
| 15.9        | STAT LED on/stuck on                   | 33        |
| <b>16.0</b> | <b>Draining the cylinder</b>           | <b>33</b> |
| 16.1        | Flushing the cylinder                  | 33        |
| <b>17.0</b> | <b>Replacement parts</b>               | <b>33</b> |
| <b>18.0</b> | <b>Guide to safe isolation</b>         | <b>35</b> |
| <b>19.0</b> | <b>Servicing and maintenance</b>       | <b>36</b> |
| 19.1        | Annual service checks                  | 36        |
| 20.2        | Disassociating an account              | 36        |
| <b>20.0</b> | <b>Service record</b>                  | <b>37</b> |

## 1.0 Cylinder details - MX number

Your cylinder MX number can be found on the label placed on the front of the cylinder.

For detailed guidance on how a Mixergy cylinder operates and how to optimise system performance, visit **[support.mixergy.co.uk](https://support.mixergy.co.uk)**

|                           |                            |
|---------------------------|----------------------------|
| Model code                | MX-180-ELE-EXT-550-1-1-A   |
| Total weight              | 227 kg (wet), 54 kg (dry)  |
| Immersion heater rating   | 230-240 V~ 2.7-3.0 kW      |
| Immersion heater type     | 1 3/4" BSP – 400mm Incoloy |
| Standing heat loss/24 hr  | 1.8 kWh                    |
| Heat exchanger rating     | -- kW                      |
| Max. supply pressure      | 1 MPa (10 bar)             |
| Expansion relief pressure | 0.6 MPa (6 bar)            |
| Max. operating pressure   | 0.55 MPa (5.5 bar)         |
| Max. coil pressure        | 0.35 MPa (3.3 bar)         |

|                                                                                                                                  |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>MX000000</b>                                                                                                                  |  |
| Scan the QR code to add your tank to your account or visit <a href="https://www.mixergy.io/register">www.mixergy.io/register</a> |                                                                                     |
| mixdevice-aaaaa-bbbbbb-ccccc-ddddd-eeee                                                                                          |                                                                                     |

Fig. 1

## 2.0 Technical data

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Max. supply pressure to pressure reducing valve | 10 bar                |
| Operating pressure                              | 3 bar                 |
| Expansion vessel charge pressure                | 3 bar                 |
| Expansion relief valve setting                  | 6 bar                 |
| P&T relief valve setting (pressure)             | 7 bar                 |
| P&T relief valve setting (temperature)          | 90 °C                 |
| Thermostat safety cut-out temperature           | 80 °C                 |
| Adjustable temperature range (digital)          | 50 - 65 °C            |
| Coil max. working pressure (indirect)           | 3.5 bar               |
| Immersion heater(s) rating                      | 230-240 V~ 2.7-3.0 kW |
| Immersion heater(s) specification               | EN 60335-2-73         |
| Immersion heater(s) type                        | 356 mm Incoloy        |

## 3.0 Safety



**This equipment must be connected to a protective earthing (PE) conductor.**



**This equipment is designed for connection to single phase supplies with the neutral conductor at earth potential – category TN or TT. This equipment is not designed for use with live and neutral connections reversed or where the neutral conductor is not at earth potential (IT supplies).**

**This device must be connected via a 16A MCB protected supply.**

**Always disconnect the device from the supply before removing or replacing the cover. This device has been manufactured in accordance with current safety standards. However, incorrect operation or misuse may result in:**

- Injury or death to the operator or third parties.
- Damage to the device and other property of the operator.
- Incorrect operation of the device.

**All persons involved in commissioning, maintaining, and servicing the device must:**

- Be suitably qualified and competent.
- Have knowledge of and experience in dealing with electrical installations.
- Read and follow these operating instructions carefully.



**Unvented hot water cylinders must not be used with solid fuel boilers as the energy source. All models are factory fitted / supplied with immersion heaters that have built-in thermal cut-outs. Heaters without thermal cut-outs must not be fitted. All unvented installations must be fitted with a pressure reducing valve (supplied) and P&T relief valve (fitted). These must not be removed or used for any other purposes than what they are designed for.**

## 4.0 Performance

| Direct                          |                |                |                |                |                |                |
|---------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Specification                   | 120L           | 150L           | 180L           | 210L           | 250L           | 300L           |
| Product Code                    | MX-120-ELE-550 | MX-150-ELE-550 | MX-180-ELE-550 | MX-210-ELE-550 | MX-250-ELE-550 | MX-300-ELE-550 |
| Nominal Capacity (L)            | 120            | 150            | 180            | 210            | 250            | 300            |
| ErP Rating                      | B              | B              | B              | B              | C              | C              |
| Insulation Thickness (mm)       | 50             | 50             | 50             | 50             | 50             | 50             |
| Connection Size/ Type           | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      |
| Immersion Heater Rating (kW)    | 3              | 3              | 3              | 3              | 3              | 3              |
| Height (mm)                     | 1117           | 1117           | 1305           | 1493           | 1743           | 1989           |
| Diameter (mm)                   | 550            | 550            | 550            | 550            | 550            | 550            |
| Weight Empty (kg)               | 24.2           | 26.4           | 30.2           | 33.6           | 37.6           | 42             |
| Weight Full (kg)                | 140.7          | 173.2          | 205.2          | 239.4          | 280.2          | 326            |
| Standing Heat Loss (kWh/24h)    | 0.86           | 0.91           | 0.96           | 1.01           | 1.34           | 1.68           |
| Standing Heat Loss (W)          | 35.83          | 37.92          | 40.00          | 42.08          | 55.83          | 70.00          |
| Min. Reheat Time 15–65°C        | 44 mins        | 44 mins        | 44 mins        | 44 mins        | 44 mins        | 44 mins        |
| 70% Charge Reheat Time 15–65°C  | 98 mins        | 123 mins       | 147 mins       | 172 mins       | 205 mins       | 245 mins       |
| 100% Charge Reheat Time 15–65°C | 140 mins       | 176 mins       | 210 mins       | 246 mins       | 293 mins       | 350 mins       |

| Direct Slimline                 |                |                |                |                |
|---------------------------------|----------------|----------------|----------------|----------------|
| Specification                   | 120L           | 150L           | 180L           | 210L           |
| Product Code                    | MX-120-ELE-475 | MX-150-ELE-475 | MX-180-ELE-475 | MX-210-ELE-475 |
| Nominal Capacity (L)            | 120            | 150            | 180            | 210            |
| ErP Rating                      | B              | B              | B              | B              |
| Insulation Thickness (mm)       | 50             | 50             | 50             | 50             |
| Connection Size/ Type           | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      |
| Immersion Heater Rating (kW)    | 3              | 3              | 3              | 3              |
| Height (mm)                     | 1247           | 1518           | 1790           | 1962           |
| Diameter (mm)                   | 475            | 475            | 475            | 475            |
| Weight Empty (kg)               | 25             | 26.2           | 32.4           | 35.4           |
| Weight Full (kg)                | 143            | 173            | 208.4          | 231.4          |
| Standing Heat Loss (kWh/24h)    | 1.25           | 1.42           | 1.51           | 1.58           |
| Standing Heat Loss (W)          | 52.08          | 59.17          | 62.92          | 65.83          |
| Min. Reheat Time 15–65°C        | 32 mins        | 32 mins        | 32 mins        | 32 mins        |
| 70% Charge Reheat Time 15–65°C  | 98 mins        | 123 mins       | 147 mins       | 172 mins       |
| 100% Charge Reheat Time 15–65°C | 140 mins       | 176 mins       | 210 mins       | 246 mins       |


## 4.0 Performance

| Indirect                                    |                |                |                |                |                |
|---------------------------------------------|----------------|----------------|----------------|----------------|----------------|
| Specification                               | 150L           | 180L           | 210L           | 250L           | 300L           |
| Product Code                                | MX-150-IND-550 | MX-180-IND-550 | MX-210-IND-550 | MX-250-IND-550 | MX-300-IND-550 |
| Nominal Capacity (L)                        | 150            | 180            | 210            | 250            | 300            |
| ErP Rating                                  | B              | B              | B              | C              | C              |
| Insulation Thickness (mm)                   | 50             | 50             | 50             | 50             | 50             |
| Connection Size/Type                        | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      |
| Immersion Heater Rating (kW)                | 3              | 3              | 3              | 3              | 3              |
| Height (mm)                                 | 1117           | 1305           | 1493           | 1743           | 1989           |
| Diameter (mm)                               | 550            | 550            | 550            | 550            | 550            |
| Weight Empty (kg)                           | 28.2           | 32.2           | 35.2           | 39.8           | 44.6           |
| Weight Full (kg)                            | 178.2          | 212.2          | 245.2          | 289.8          | 344.6          |
| Coil Rating (kW)                            | 18.3           | 19.4           | 19.9           | 20.7           | 23.6           |
| BRE Appendix Q Standing Heat Loss (kWh/24h) | 0.91           | 0.96           | 1.01           | 1.34           | 1.68           |
| Standing Heat Loss (kWh/24h)                | 1.42           | 1.58           | 1.74           | 1.94           | 2.16           |
| Standing Heat Loss (W)                      | 59.17          | 65.83          | 72.50          | 80.83          | 90.00          |
| Min. Reheat Time 15–65°C                    | 11 mins        | 11 mins        | 12 mins        | 12 mins        | 12 mins        |
| 25% Charge Reheat Time 15–65°C              | 11 mins        | 11 mins        | 12 mins        | 12 mins        | 12 mins        |
| 70% Charge Reheat Time 15–65°C              | 20 mins        | 22 mins        | 26 mins        | 30 mins        | 31 mins        |
| 100% Charge Reheat Time 15–65°C             | 29 mins        | 31 mins        | 37 mins        | 42 mins        | 44 mins        |

| Indirect Slimline                           |                |                |                |                |
|---------------------------------------------|----------------|----------------|----------------|----------------|
| Specification                               | 120L           | 150L           | 180L           | 210L           |
| Product Code                                | MX-120-IND-475 | MX-150-IND-475 | MX-180-IND-475 | MX-210-IND-475 |
| Nominal Capacity (L)                        | 120            | 150            | 180            | 210            |
| ErP Rating                                  | B              | C              | C              | C              |
| Insulation Thickness (mm)                   | 50             | 50             | 50             | 50             |
| Connection Size/Type                        | 22mm comp      | 22mm comp      | 22mm comp      | 22mm comp      |
| Immersion Heater Rating (kW)                | 3              | 3              | 3              | 3              |
| Height (mm)                                 | 1247           | 1518           | 1790           | 1962           |
| Diameter (mm)                               | 475            | 475            | 475            | 475            |
| Weight Empty (kg)                           | 26.6           | 30.4           | 34.8           | 37             |
| Weight Full (kg)                            | 146.6          | 180.4          | 214.8          | 247            |
| Coil Rating (kW)                            | 17.8           | 18.3           | 19.4           | 19.9           |
| BRE Appendix Q Standing Heat Loss (kWh/24h) | 1.25           | 1.42           | 1.51           | 1.58           |
| Standing Heat Loss (kWh/24h)                | 1.36           | 1.6            | 1.82           | 1.98           |
| Standing Heat Loss (W)                      | 56.67          | 66.67          | 75.83          | 82.50          |
| Min. Reheat Time 15–65°C                    | 11 mins        | 11 mins        | 11 mins        | 11 mins        |
| 70% Charge Reheat Time 15–65°C              | 13 mins        | 15 mins        | 17 mins        | 20 mins        |
| 100% Charge Reheat Time 15–65°C             | 19 mins        | 21 mins        | 24 mins        | 29 mins        |

## 5.0 Additional components


- Monobloc cold water inlet control group including pressure reducing valve, check valve, pressure and temperature relief valve and expansion relief valve (unvented only)




- Tundish (unvented only)




- Expansion vessel including mounting bracket and 3/4" x 22mm adaptors (unvented only)




- 3 kW immersion heater(s) 1.3/4" BSP (factory fitted)




- 2-port diverter valve V4043H1056 (indirect only)



- WIFI dongle TL-WN823N



- Ethernet cable



- User guide



- Gauge




Fig. 2

Plate heat exchanger assembly:  
Optional extra for heat pumps.

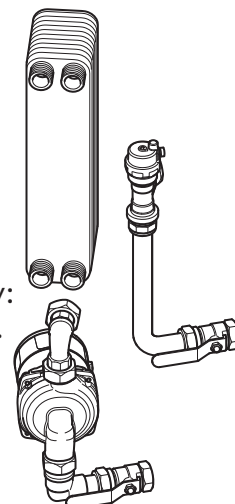


Fig. 3

## 6.0 Design notes

The Mixergy cylinder is currently available in two variations:

- **Direct** - provides hot water heated by electricity and is designed primarily for use with off peak/time of use tariffs.
- **Indirect** - provides hot water either by electricity or an internal primary coil which is designed for use with gas or oil fired boilers.

In addition, Mixergy cylinders can be fitted with the following options:

- PV switch to allow compatibility with third party PV diverters.
- Factory fitted PV diverter.
- Heat pump exchanger module for use with heat pumps.



**Unvented hot water cylinders must not be used with solid fuel boilers as the energy source.**

**All models are factory fitted / supplied with immersion heaters that have built-in thermal cut-outs. Immersion heaters without thermal cut-outs must not be fitted.**

**All unvented installations must be fitted with a pressure reducing valve (supplied) and P&T relief valve (fitted). These must not be removed or used for any other purposes than what they are designed for.**

The unit should be handled with care in order to avoid damage.  
It should be stored upright in a dry place.

## 7.0 Schematic: Indirect

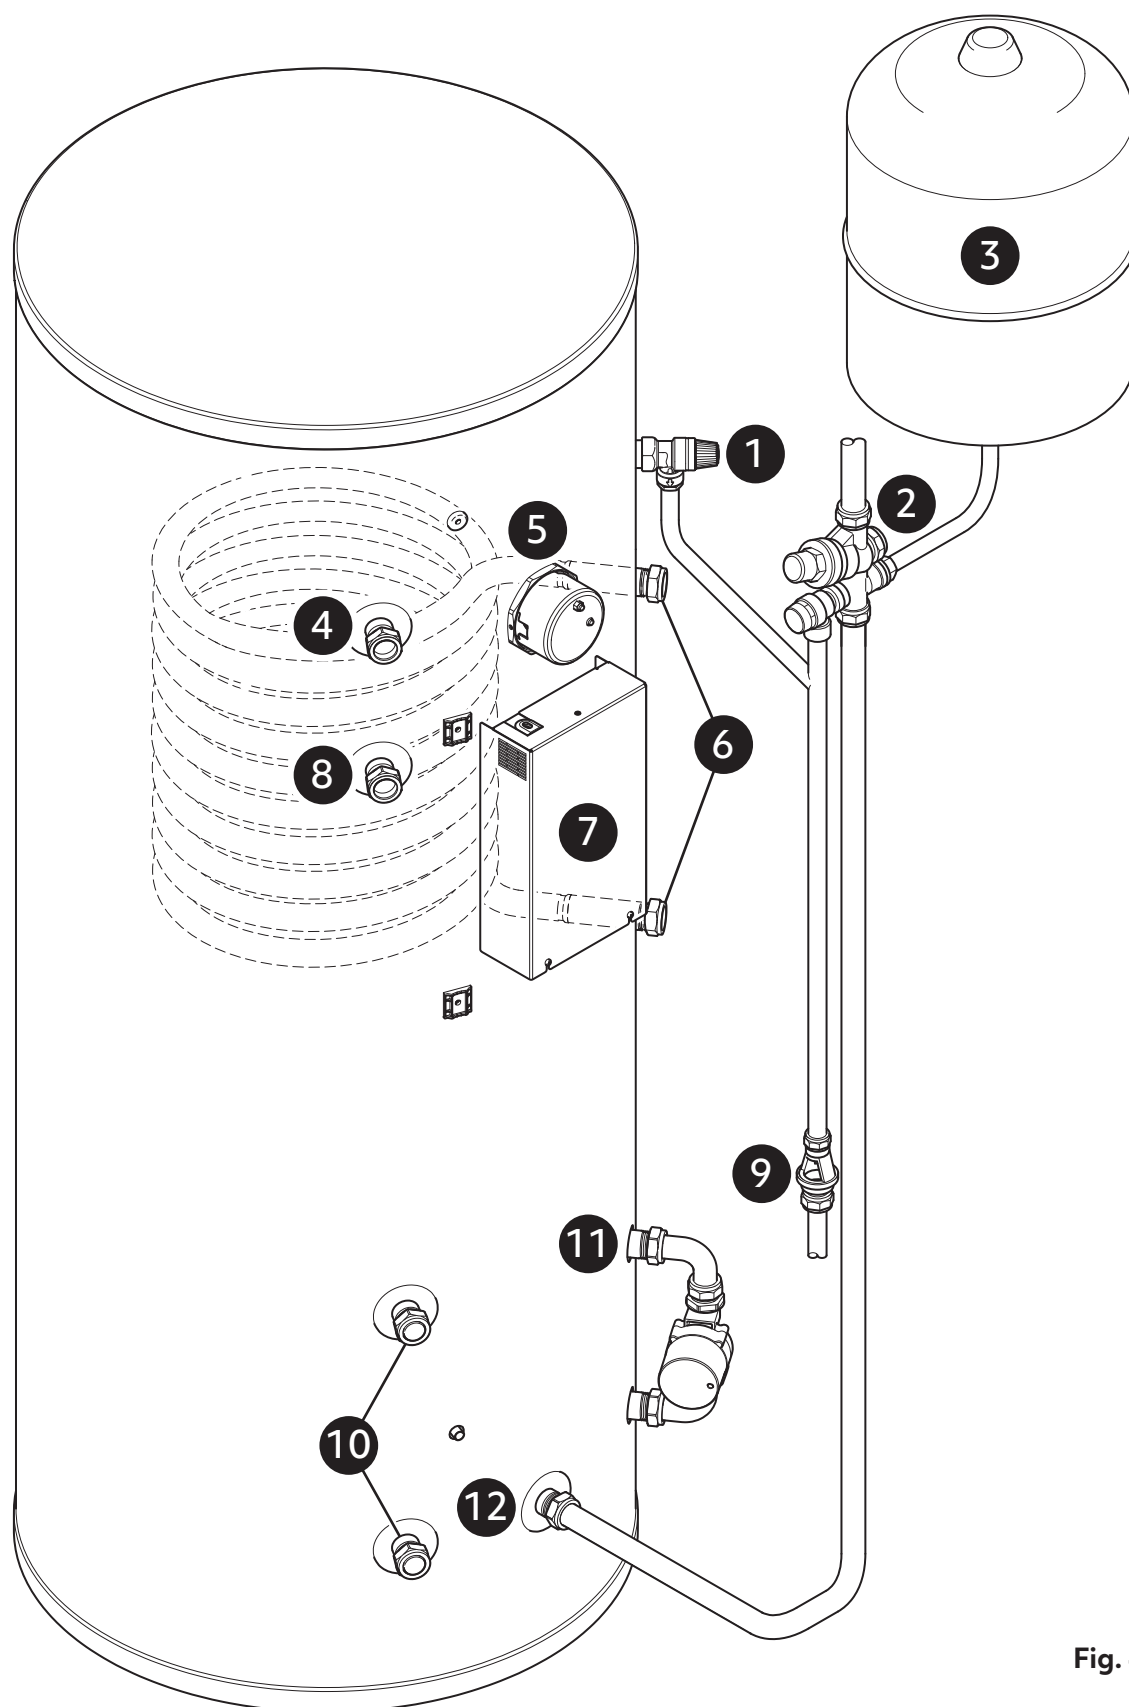


Fig. 4

- |    |                        |     |                                             |
|----|------------------------|-----|---------------------------------------------|
| 1. | T&P relief valve       | 8.  | Secondary return (210L, 250L, 300L only)    |
| 2. | Inlet control monobloc | 9.  | Tundish and discharge pipework              |
| 3. | Expansion vessel       | 10. | Heat pump ready ports (Cap off if not used) |
| 4. | Hot water outlet       | 11. | Pump assembly                               |
| 5. | Primary immersion      | 12. | Cold inlet                                  |
| 6. | Primary coil           |     |                                             |
| 7. | Controller             |     |                                             |

## 8.0 Schematic: Direct

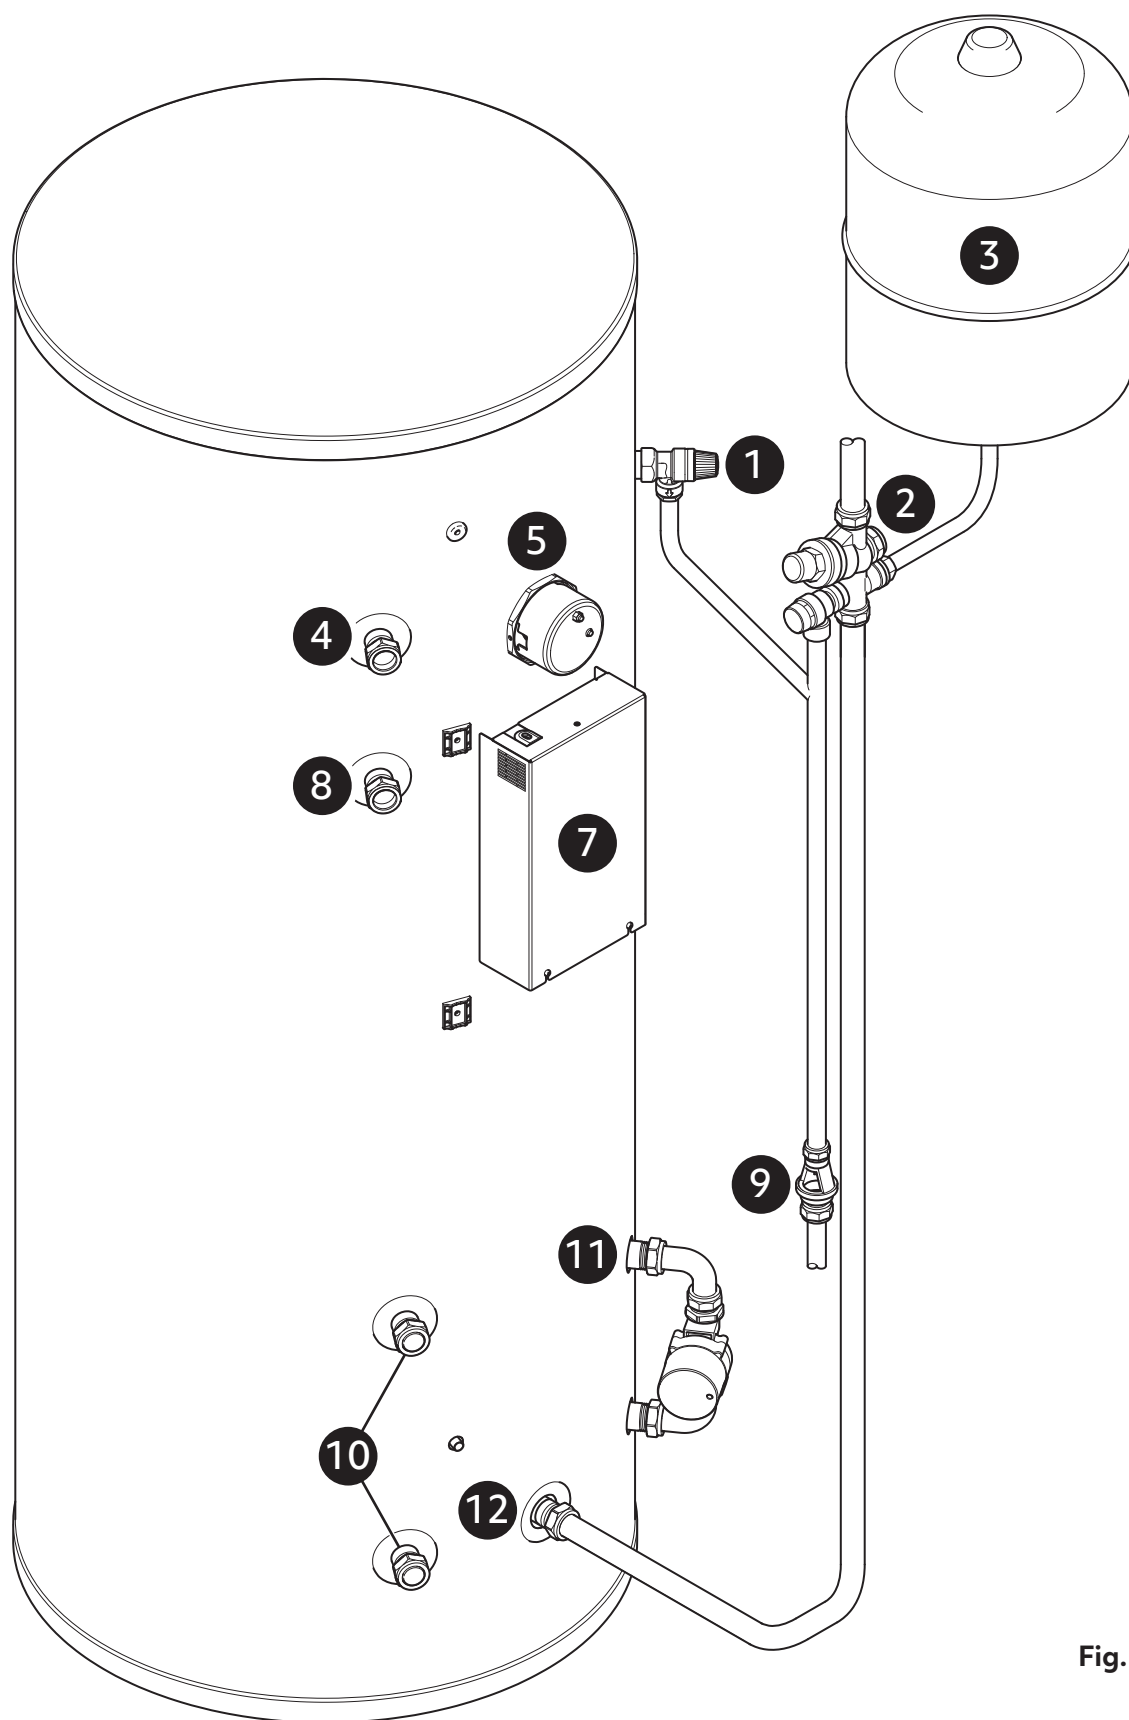


Fig. 5

- |    |                        |     |                                             |
|----|------------------------|-----|---------------------------------------------|
| 1. | T&P relief valve       | 8.  | Secondary return (210L, 250L, 300L only)    |
| 2. | Inlet control monobloc | 9.  | Tundish and discharge pipework              |
| 3. | Expansion vessel       | 10. | Heat pump ready ports (Cap off if not used) |
| 4. | Hot water outlet       | 11. | Pump assembly                               |
| 5. | Primary immersion      | 12. | Cold inlet                                  |
| 6. | N/A                    |     |                                             |
| 7. | Controller             |     |                                             |

## 9.0 Hydraulic schematics

### 9.1 Direct unvented

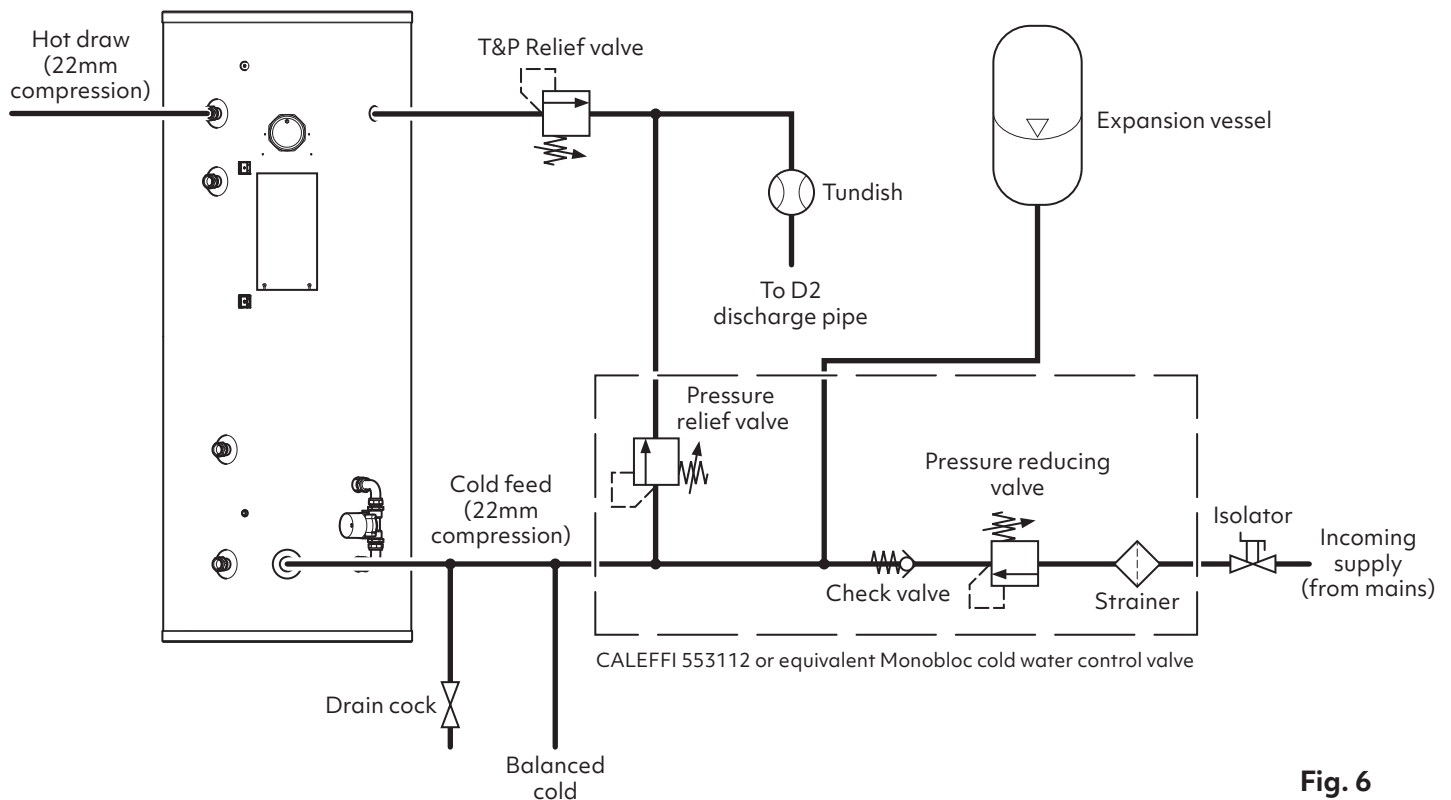


Fig. 6

### 9.2 Indirect unvented

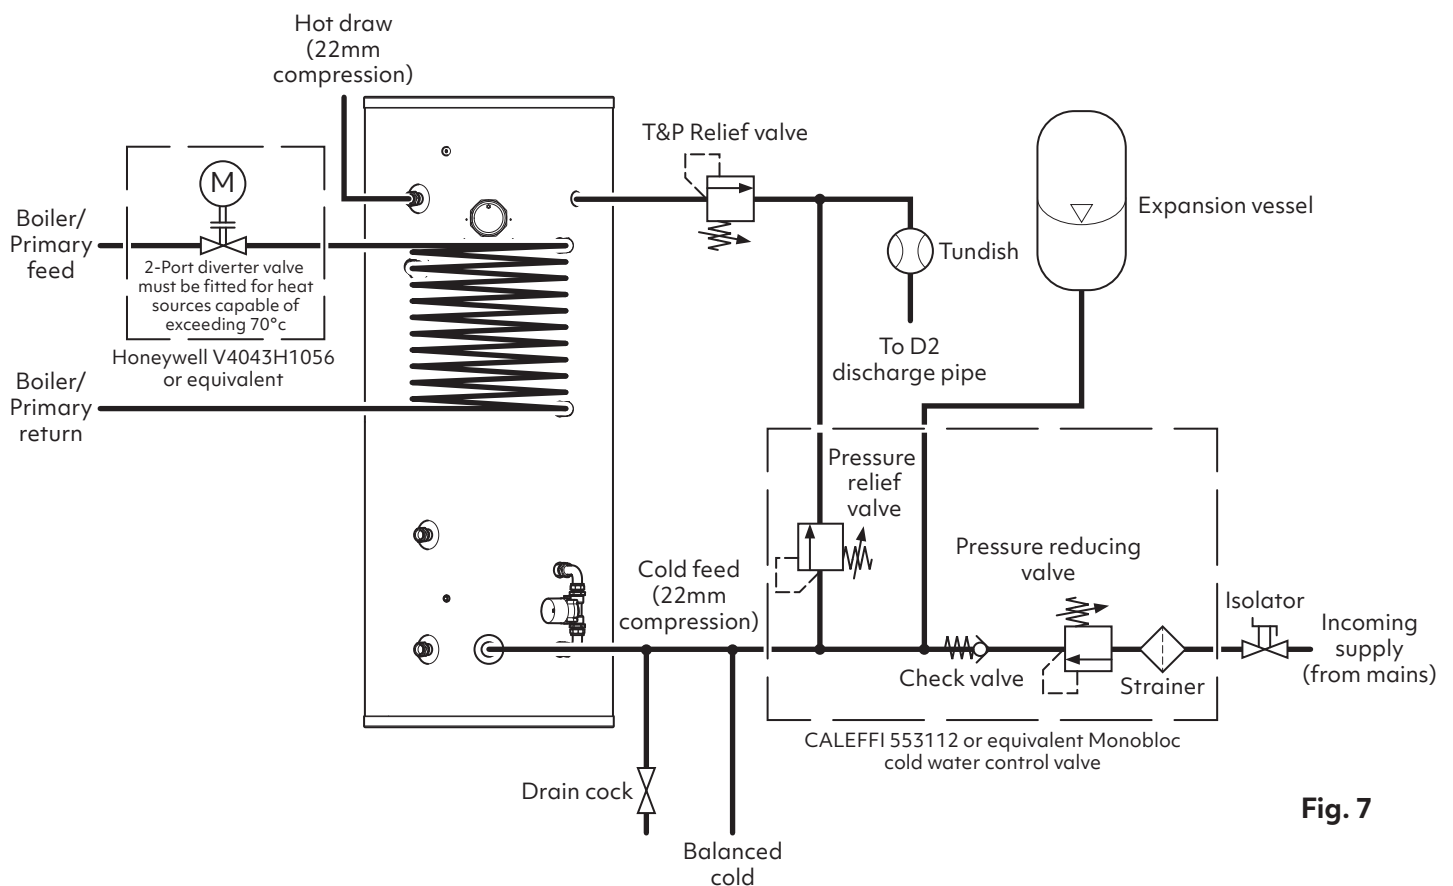


Fig. 7

## 10.0 Installation: general guidelines



In the case of an unvented installation, this product should only be installed by a “competent operative” i.e. the installer must have attended a recognised course in unvented hot water systems.

The installation area should be able to cope with the weight, incoming pipes and discharge pipe when full.

### 10.1 Positioning of the cylinder

Position of the cylinder should suit the installation; all connections should be to the front for ease of access.

Ensure suitable space is left for access for repair and/or replacement of immersions and valves etc.

**Ensure at-least 100mm of vertical clearance above the cylinder.**

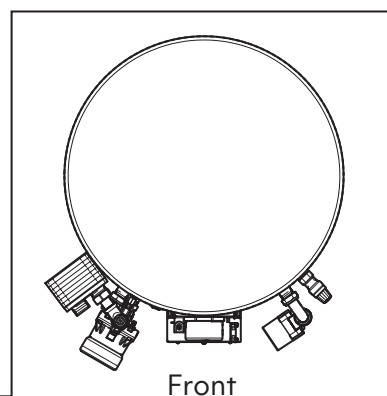


Fig. 8


#### Mixergy X

| Model        | 120L  | 150L   | 180L   | 210L   | 250L   | 300L   |
|--------------|-------|--------|--------|--------|--------|--------|
| Height       | 986mm | 1166mm | 1346mm | 1526mm | 1766mm | 2066mm |
| Diameter     | 582mm | 582mm  | 582mm  | 582mm  | 582mm  | 582mm  |
| Weight empty | 35kg  | 38kg   | 42kg   | 45kg   | 51kg   | 55kg   |
| Weight full* | 155kg | 188kg  | 212kg  | 255kg  | 301kg  | 355kg  |

#### Mixergy X Slimline

| Model        | 120L   | 150L   | 180L   | 210L   |
|--------------|--------|--------|--------|--------|
| Height       | 1250mm | 1440mm | 1690mm | 2000mm |
| Diameter     | 479mm  | 479mm  | 479mm  | 479mm  |
| Weight empty | 33kg   | 37kg   | 41kg   | 45kg   |
| Weight full* | 151kg  | 184kg  | 208kg  | 242kg  |

## 10.0 Installation: general guidelines

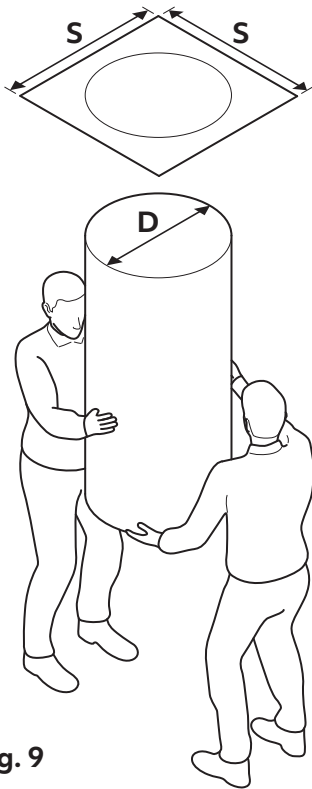

\* Add 5kg to the full cylinder weight for cylinders with an external heat exchanger fitted.



**Ensure that any apertures (such as loft hatches) that the cylinder must pass through, meet the minimum space requirement S.**

| Nominal diameter D | Space requirement S |
|--------------------|---------------------|
| 470-480mm          | 550mm               |
| 550-582mm          | 700mm               |
| 700-720mm          | 850mm               |

Fig. 9

### 10.2 Unvented installations

In the case of an unvented installation, installers should ensure incoming mains pressure is less than 10 bar and at-least 1 bar with a minimum flow rate of 10 L/min.

### 10.3 Pipework and cold water inlet control group

The unit should be piped in with a nominal 22mm pipe to ensure adequate flow rate. The unit is supplied with a monobloc pressure reducing valve that has a set pressure of 3 bar. The valve also consists of a serviceable strainer, non-return valve, expansion relief valve, connection for an expansion vessel and balanced cold feed supply. We would strongly recommend fitting an isolating valve (not supplied) prior to the monobloc valve for ease of maintenance at a later date. Under no circumstances should an isolating valve be fitted between the expansion valve and the storage cylinder.

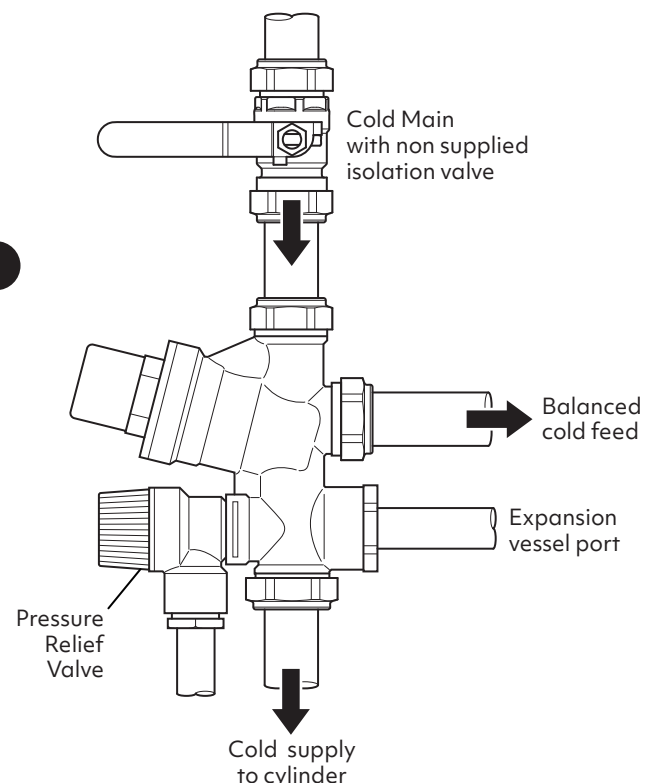


Fig. 10

### 10.4 Fitting a drain valve

Please ensure that a drain valve is fitted to the lowest part of the pipework installation.




Fig. 11

## 10.0 Installation: general guidelines

### 10.5 Positioning the tundish


The tundish, which shows visible discharge from the relief valves, is to be in a prominent, visible and safe position away from any electrical devices. See 11.1 Discharge pipes from safety devices on page 17.

### 10.6 Checking the pump and T&P relief valve

The temperature and pressure relief valve is set at 7 bar and 90°C. Both the pump and T&P valve are factory fitted and sealed prior to dispatch. Whilst we endeavour to make sure there are no leaks from these seals, we would advise checking the connection as the valve/pump may have been disrupted in transit.

### 10.7 Fitting the expansion vessel

The expansion vessel should be checked and if required charged at 3.0 bar. The vessel should be mounted securely to the wall or sufficient support with the fixing kit supplied. The connection should be made between the vessel and monobloc kit using the included 3/4" x 22mm compression adaptor.

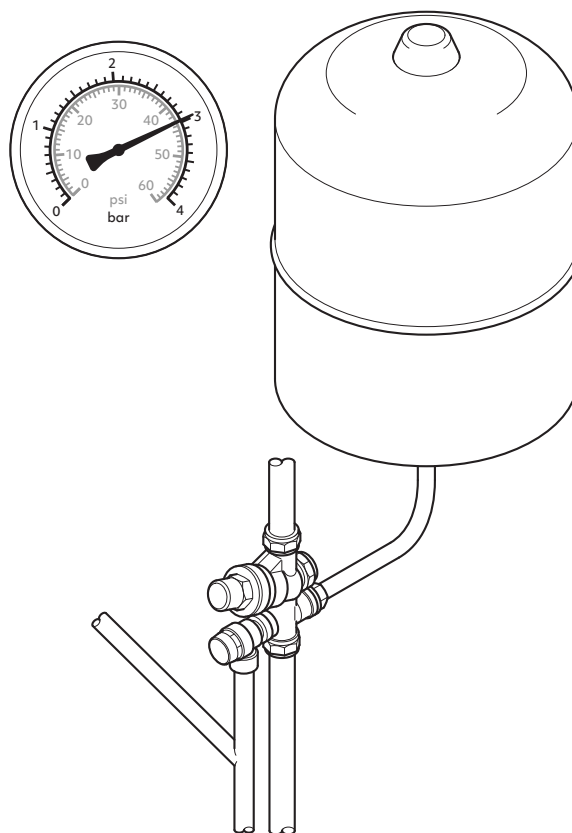

**The relief valves are only to be used for relief discharge purposes. No valves should be fitted between the relief valves and the cylinder.**

Fig. 12

## 11.0 Discharge pipework

### 11.1 Discharge pipes from safety devices

- Safety devices such as temperature relief valves or combined temperature and pressure relief valves should discharge either directly or by way of a manifold via a short length of metal pipe (D1) to a tundish (Fig. 14).
- The diameter of discharge pipe (D1) should be not less than the nominal outlet size of the safety device, e.g. temperature relief valve.
- Where a manifold is used it should be sized to accept and discharge the total discharge from the discharge pipes connected to it.
- Where valves other than a temperature and pressure relief valve from a single unvented hot water system discharge by way of the same manifold that is used by the safety devices, the manifold should be factory fitted as part of the hot water storage system unit or package.

### 11.2 Tundish

- The tundish should be vertical, located in the same space as the unvented hot water storage system and be fitted as close as possible to, and lower than, the safety device, with no more than 600mm of pipe between the valve outlet and the tundish. Note: to comply with the Water Supply (Water Fittings) Regulations, the tundish should incorporate a suitable air gap.
- Any discharge should be visible at the tundish. In addition, where discharges from safety devices may not be apparent, e.g. in dwellings occupied by people with impaired vision or mobility, consideration should be given to the installation of a suitable safety device to warn when discharge takes place, e.g. electronically operated.




Fig. 13

### 11.3 Typical discharge pipe arrangement

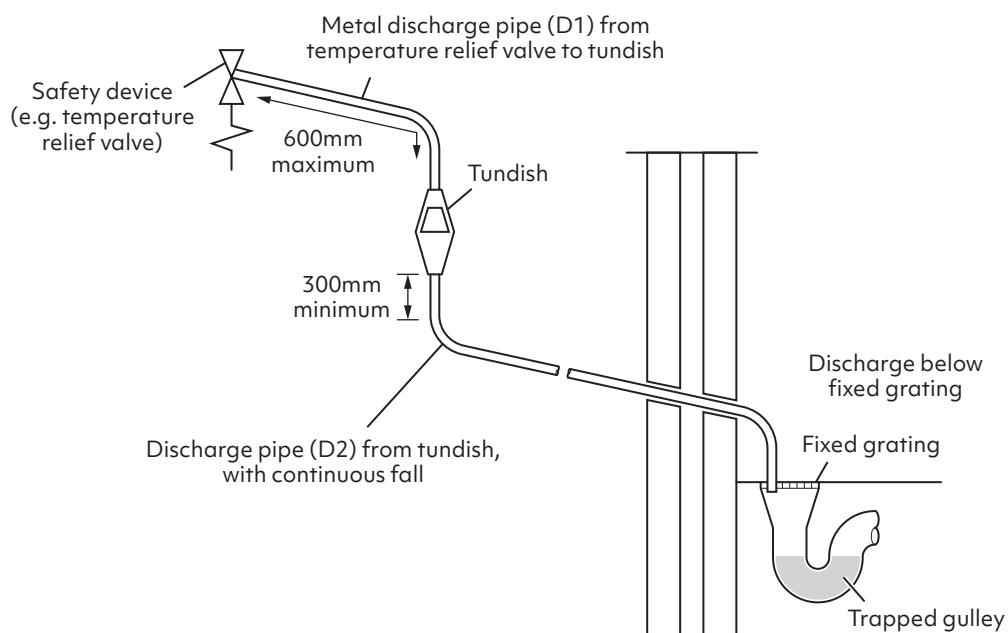


Fig. 14

## 11.0 Discharge pipework

### 11.4 Sizing of copper discharge pipe D2 for common temperature relief valve outlet sizes

| Valve outlet size | Minimum size of discharge pipe D1 | Minimum size of discharge pipe D2 from tundish | Maximum resistance allowed, expressed as a length of straight pipe | Resistance created by each elbow or bend |
|-------------------|-----------------------------------|------------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| G 1/2"            | 15mm                              | 22mm                                           | < 9m                                                               | 0.8m                                     |
|                   |                                   | 28mm                                           | <18m                                                               | 1.0m                                     |
|                   |                                   | 35mm                                           | <27m                                                               | 1.4m                                     |
| G 3/4"            | 22mm                              | 28mm                                           | <9m                                                                | 1.0m                                     |
|                   |                                   | 35mm                                           | <18m                                                               | 1.4m                                     |
|                   |                                   | 42mm                                           | <27m                                                               | 1.7m                                     |

### 11.5 Discharge pipe D2

- The discharge pipe (D2) from the tundish should have a vertical section of pipe at least 300mm long below the tundish before any elbows or bends in the pipework. It should be installed with a continuous fall of at least 1 in 200 (Fig. 14).
- The discharge pipe (D2) should be made of metal or other material that has been demonstrated to be capable of safely withstanding temperatures of the water discharged and is clearly and permanently marked to identify the product and performance standard (e.g. as specified in the relevant part of BS 7291-1:2006.)
- The discharge pipe (D2) should be at least one pipe size larger than the nominal outlet size of the safety device unless its total equivalent hydraulic resistance exceeds that of a straight pipe 9m long, i.e. for discharge pipes between 9m and 18m the equivalent resistance length should be at least two sizes larger than the nominal outlet size of the safety device; between 18 and 27m at least 3 sizes larger, and so on; bends must be taken into account in calculating the flow resistance.
- Where a single common discharge pipe serves more than one system, it should be at least one pipe size larger than the largest individual discharge pipe (D2) to be connected.

**An alternative approach for sizing discharge pipes would be to follow Annex D, section D.2 of BS 6700:2006 + A1:2009 Specification for design, installation, testing and maintenance of services supplying water for domestic use within buildings and their curtilages.**

## 11.0 Discharge pipework

- The discharge pipe should not be connected to a soil discharge stack unless it can be demonstrated that the soil discharge stack is capable of safely withstanding the temperatures of the water discharged, in which case, it should contain a mechanical seal, not incorporating a water trap, which allows water into the branch pipe without allowing foul air from the drain to be ventilated through the tundish.
- If plastic pipes are used as branch pipes carrying discharge from a safety device, they should be either polybutylene (PB) or cross-linked polyethylene (PE-X) complying with national standards such as Class S of BS 7291-2:2006 or Class S of BS 7291-3:2000 respectively; and be continuously marked with a warning that no sanitary appliances should be connected to the pipe.
- Where pipes cannot be connected to the stack it may be possible to route a dedicated pipe alongside or in close proximity to the discharge stack.

**Plastic pipes should be joined and assembled with fittings appropriate to the circumstances in which they are used as set out in BS EN ISO 1043-1:2002.**

### 11.6 Termination of discharge pipe

The discharge pipe (D2) from the tundish should terminate in a safe place where there is no risk to persons in the vicinity of the discharge.


Examples of acceptable discharge arrangements are:

- To a trapped gully with the end of the pipe below a fixed grating and above the water seal.
- Downward discharges at low level; i.e. up to 100mm above external surfaces such as car parks, hard standings, grassed areas etc. are acceptable providing that a wire cage or similar guard is positioned to prevent contact, whilst maintaining visibility.
- Discharges at high level: e.g. into a metal hopper and metal downpipe with the end of the discharge pipe clearly visible or onto a roof capable of withstanding high temperature discharges of water and 3m from any plastic guttering system that would collect such discharges.

## 12.0 Installation: electrical



**ENSURE ALL ELECTRICAL SUPPLIES ARE SWITCHED OFF BEFORE MAKING ANY CONNECTION TO THE UNIT.**



**ELECTRICAL INSTALLATION MUST BE CARRIED OUT BY COMPETENT ELECTRICIAN AND BE IN ACCORDANCE WITH THE LATEST I.E.T. REGULATIONS**

### 12.1 Accessing the controller



**ENSURE ALL ELECTRICAL SUPPLIES ARE SWITCHED OFF BEFORE REMOVING OR REPLACING THE CONTROLLER LID.**

Access to the electronics can be made by loosening the two screws at the bottom of the controller and lifting up on the lid (Fig. 15).

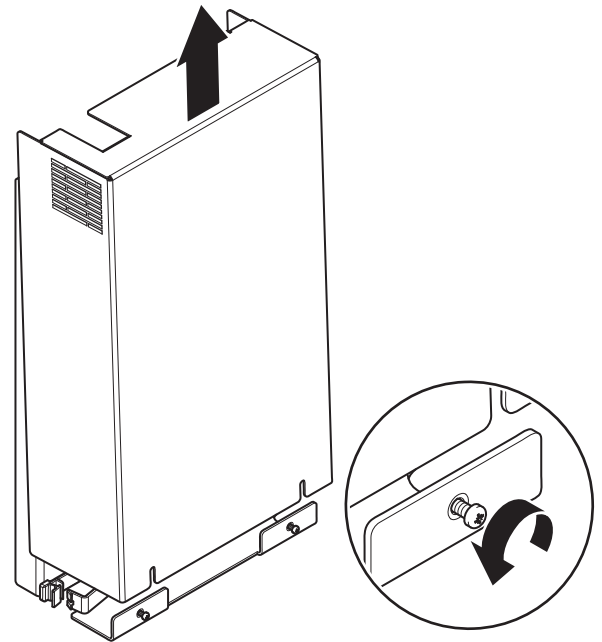


Fig. 15

### 12.2 Fitting the gauge

Self adhesive pad

Magnetic strip

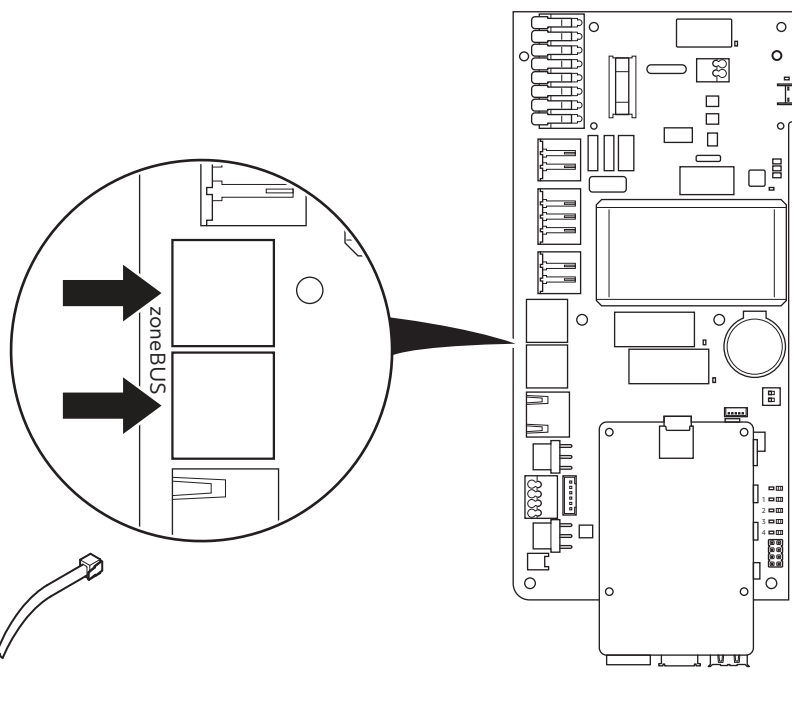


Fig. 16

## 12.0 Installation: electrical

The gauge has a magnetic backing strip to attach directly to the cylinder, or by using the self adhesive pad can be installed outside of the cylinder cupboard for easy user access.

If required, the cable can be extended by using a RJ11 extension cable (available from Mixergy).

Remove the controller lid (Fig. 15). Insert the connector into either of the zoneBUS ports in the controller (Fig. 16).

### 12.3 General guidelines

All high voltage connections to this unit are made to spring clamp terminals. Cables should be stripped back 10mm for insertion into these terminals. It is recommended to ensure that the protective earth conductor is kept at least 10mm longer than all other terminated conductors in the cable. No more than 55mm of outer insulation should be removed. Terminals can be accessed by lifting up the orange levers. Cables must be appropriately sized according to latest I.E.T regulations.

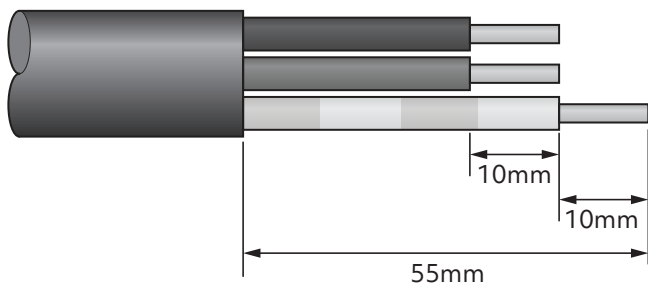


Fig. 17

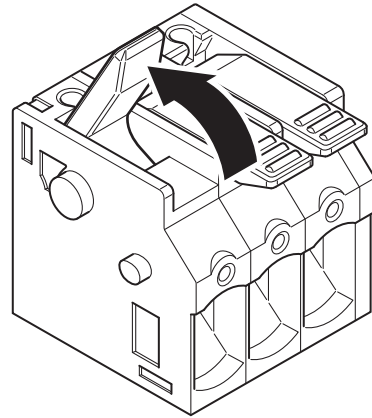


Fig. 18

### 12.4 Strain relief

Screwed strain relief is provided for all high voltage connections. A PZ1 screwdriver is required to tighten the strain relief. Low voltage cables should be routed through the support pillars to provide strain relief.

### 12.5 Indirect units and electrical wiring

On indirect units, where a coil is fitted to the cylinder, the supplied two port motorized zone valve must be fitted when the indirect source is capable of exceeding 70°C in accordance with the instruction details supplied for the appropriate installation. Maximum working pressure of the coils is 3.5 Bar. All electrical wiring to electronics, zone valve and immersion heaters must be earthed and to current IEE Wiring Regulations.

## 12.0 Installation: electrical

### 12.6 Wiring diagram - Indirect

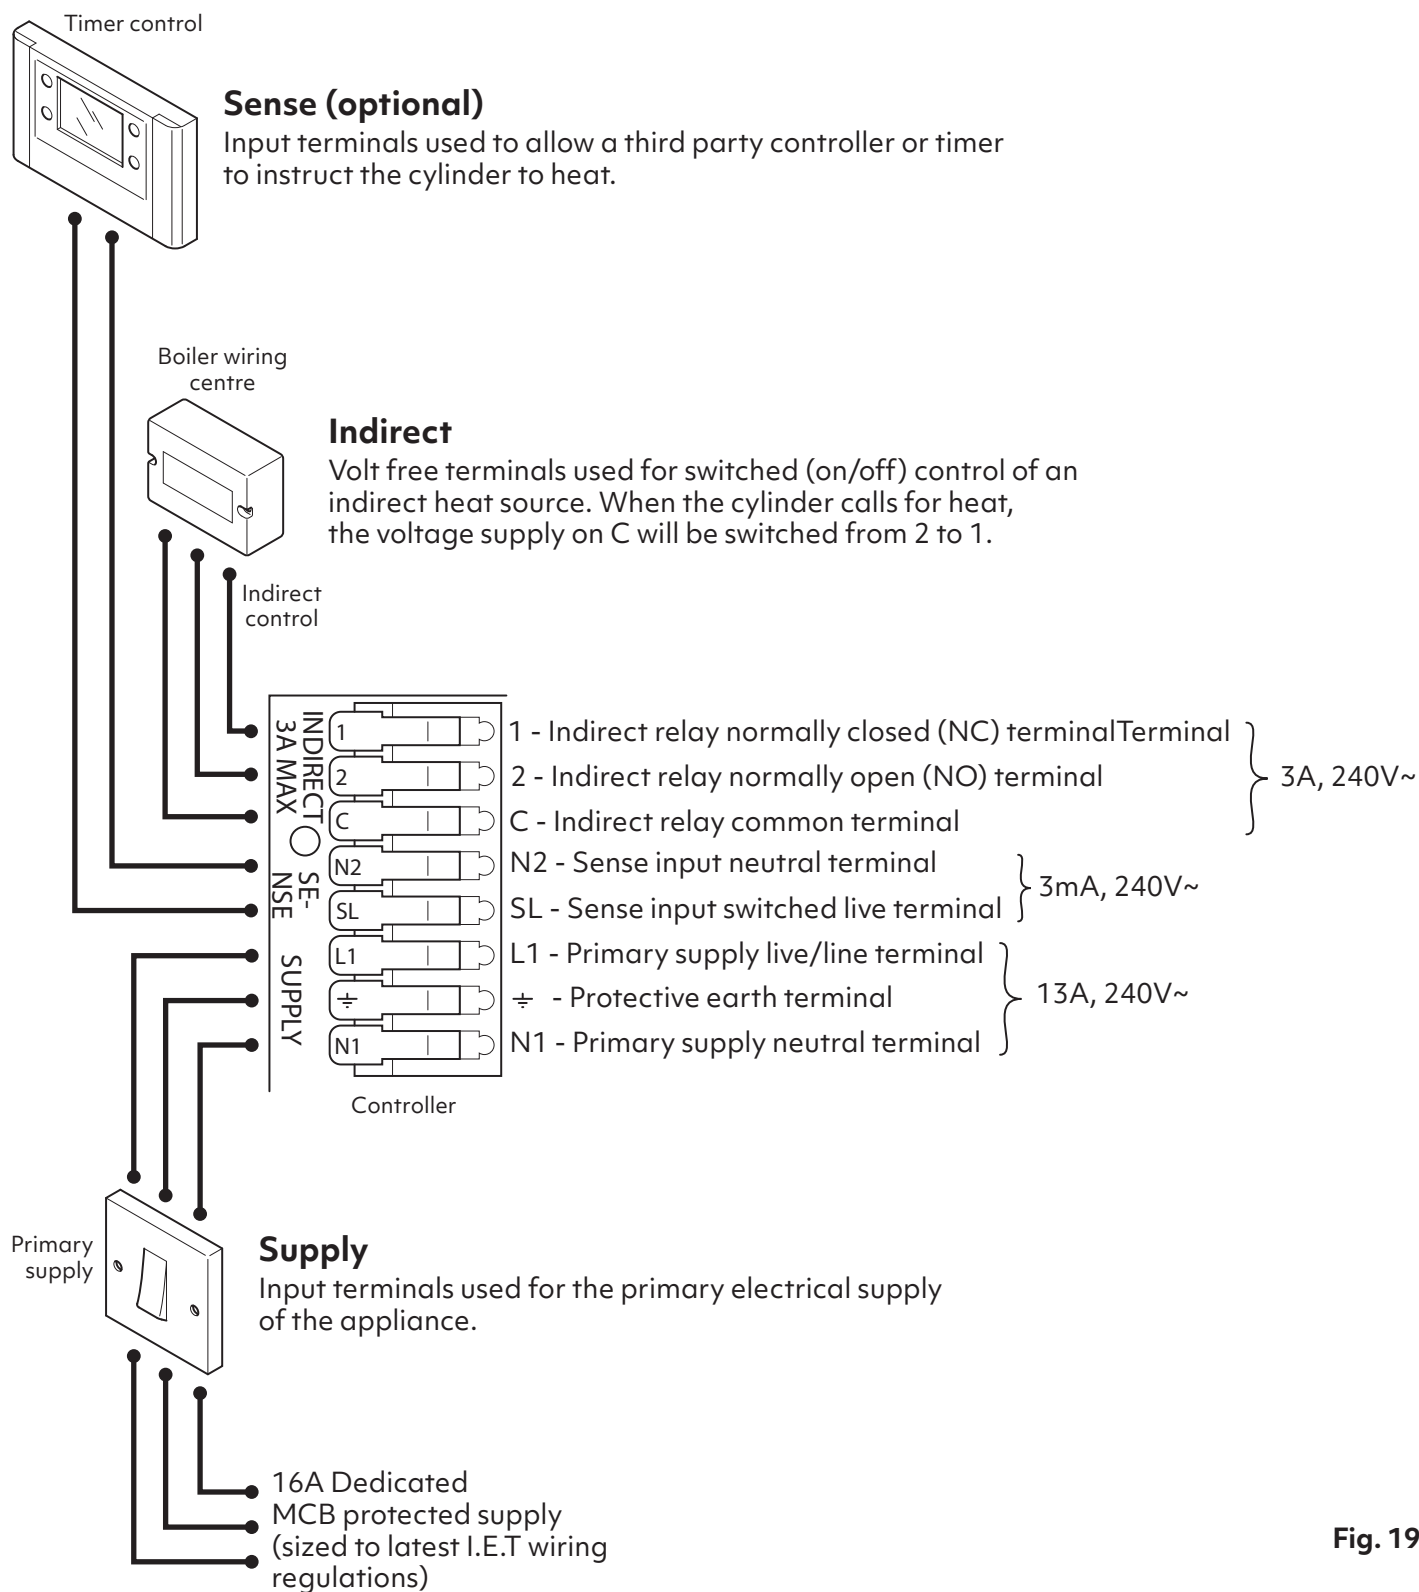


Fig. 19

## 12.0 Installation: electrical

### 12.7 Wiring diagram - Direct

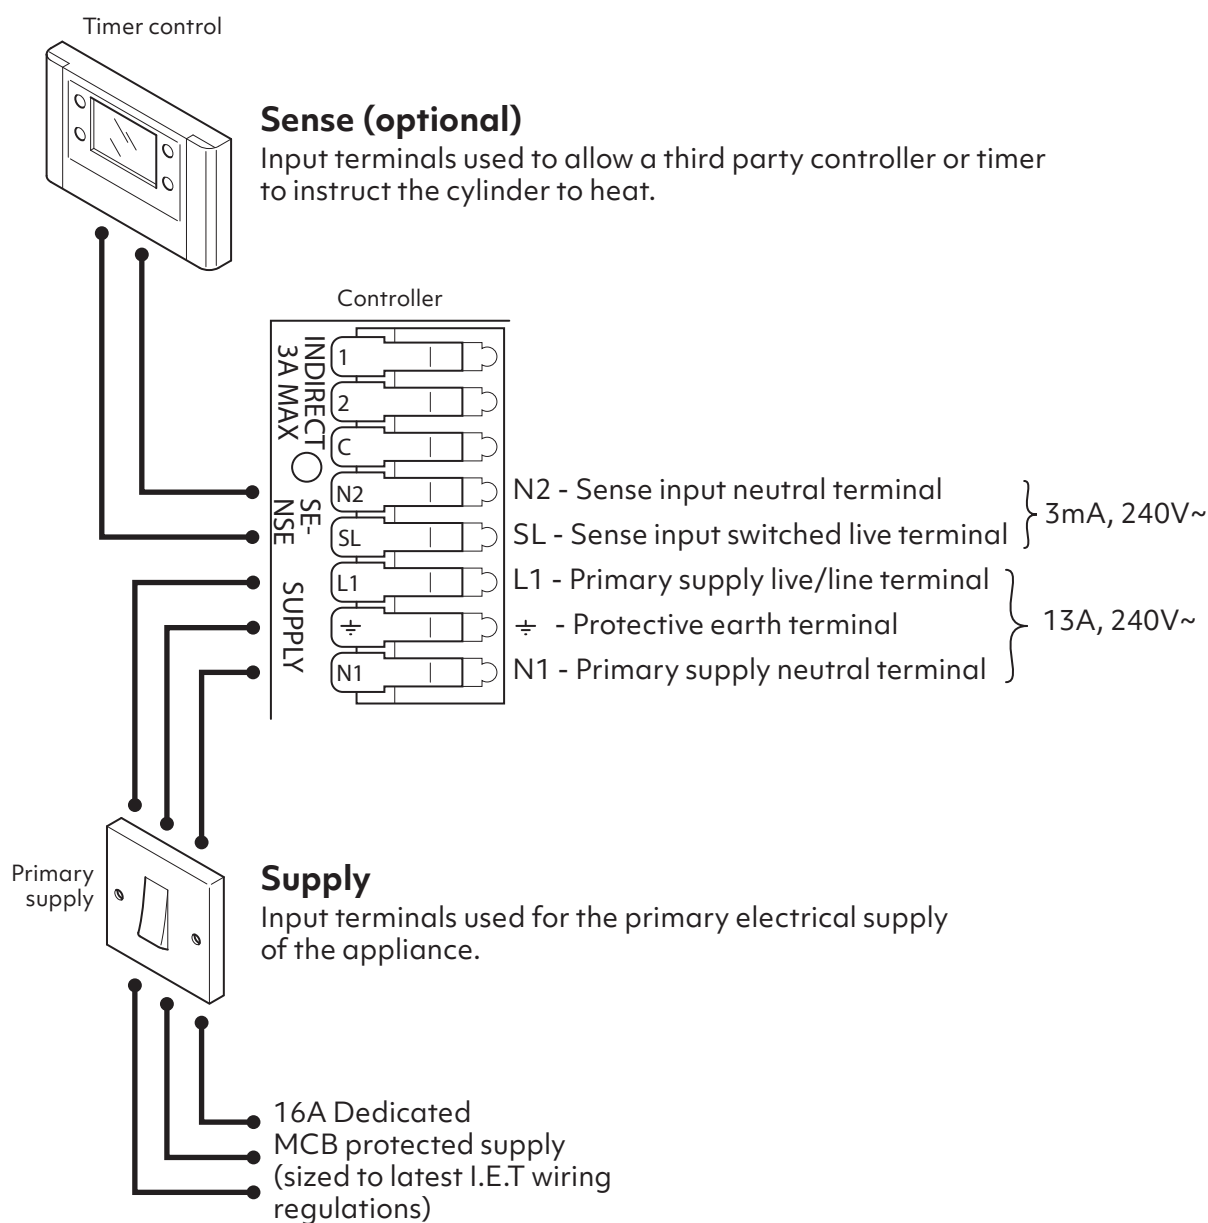


Fig. 20

## 13.0 Installation: connectivity

### 13.1 Connectivity

The Mixergy cylinder delivers the best experience when the controller is connected to the internet. A connection lets the homeowner or resident use the Mixergy app to:

- Set and optimise hot water schedules
- Use smart tariffs where available
- Control hot water from anywhere
- Unlock additional savings

Set up the controller to match the property's connectivity options. The resident can then create an account and connect the controller to the Mixergy app.

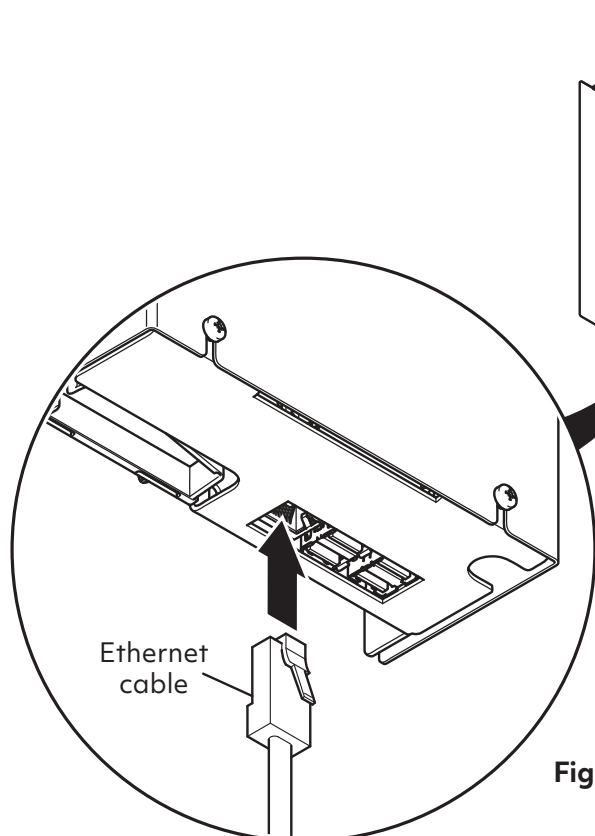


Fig. 21

#### Option 1: Hardwired connection (Ethernet)

Plug an Ethernet cable into the controller's network port. (Fig. 21).

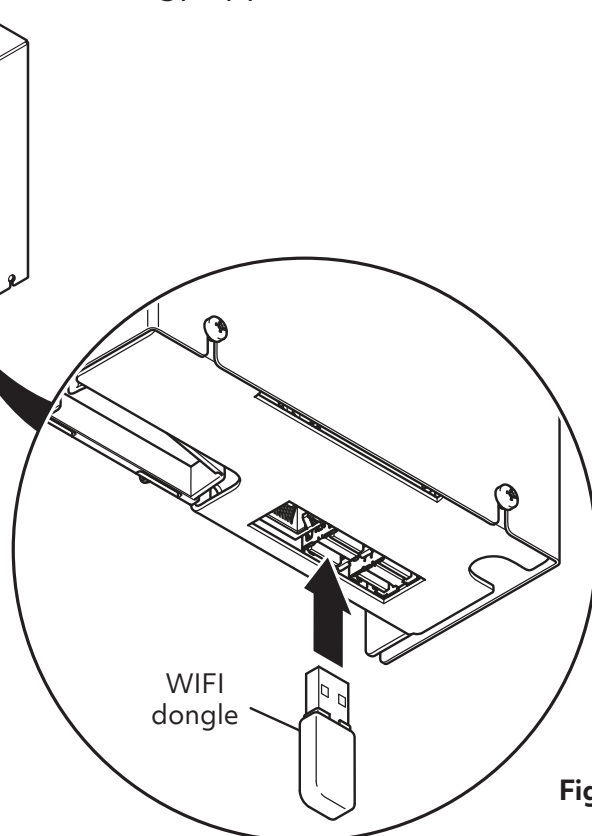


Fig. 22

#### Option 2: No hardwired connection (WiFi via dongle)

If the property does not have a hardwired connection, plug the supplied WiFi dongle into one of the controller's USB ports (Fig. 22).

### 13.2 Supporting a homeowner or resident at set up

If you are helping a homeowner or resident get set up, ask them to download the Mixergy app and follow the in-app steps.

If the WiFi signal is weak at the controller, use the supplied 2m USB extension cable to reposition the dongle and test again.

For more detail, refer to the User Guide in the box or visit [support.mixergy.co.uk](https://support.mixergy.co.uk).

## 14.0 Commissioning



**DO NOT SWITCH THE SYSTEM ON UNLESS THE CYLINDER IS COMPLETELY FILLED WITH WATER.**

All factory fitted valves etc. are fitted using a thread sealant. If this seal is broken it should be re-sealed using a suitable sealant. It is the installer's responsibility to ensure all the connections are water tight prior to leaving the property.

1. Ensure the drain on the cold feed pipework is closed.
2. Open a hot tap the furthest distance from the unit.
3. Gradually open the cold mains isolator valve and fill cylinder until water appears at the hot tap. Attend to each hot water outlet in turn and ensure water flow is obtained at each outlet expelling any air within the pipework.
4. To ensure the safety valves are operating correctly, turn the tops of the valves independently to ensure water passes through the valve and into the tundish. Once this is confirmed, open both valves together allowing as much water as possible to flow through the tundish. At this point make sure that your discharge pipework is free from debris and is transporting the water away to waste effectively. The valves can then be released and a check should be made to ensure they have re-seated correctly.


5. Switch on the Mixergy cylinder and check for correct operation. **Mixergy cylinders come supplied in 'eco mode'. Pressing any button on the gauge twice will exit eco mode.**

On power up the tank controller runs a series of tests and displays the results on the gauge.

Note that this will only run when the main controller has booted up which takes approximately 50 seconds.

Check that no LEDs light red and that the bottom seven LEDs light green.

Fig. 23 shows the meaning of each LED.

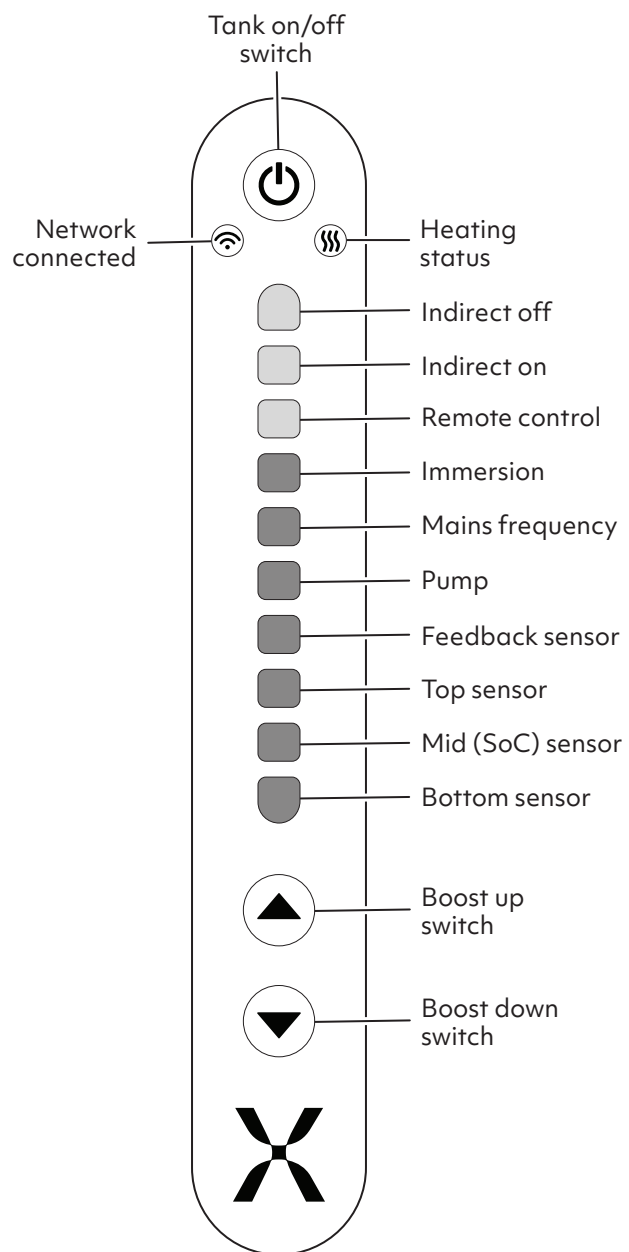

Key - Light colours

Blue

Green

**Fig. 23**

## 14.0 Commissioning

Note that if a voltage is applied to the Remote Control input the Remote Control LED will light green rather than blue.

**Check that all buttons (boost UP, boost DOWN and power) work correctly.**

**Ensure the cylinder's gauge illuminates and all buttons (boost UP, boost DOWN and power) work correctly.**

**For more detailed guidance on gauge operation, please visit [support.mixergy.co.uk](http://support.mixergy.co.uk)**

### 14.1 Access the controller

Access to the electronics can be made by loosening the two screws at the bottom of the controller and lifting up on the lid (Fig. 24).

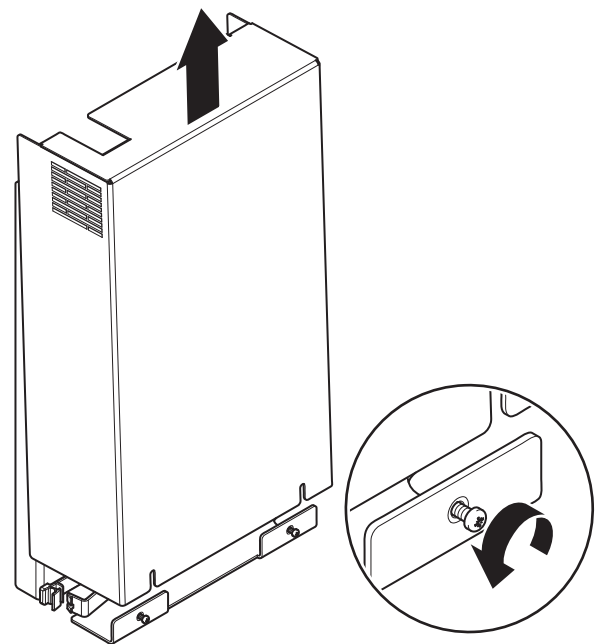


Fig. 24

### 14.2 Connect peripherals

Peripheral devices (such as the included gauge, PV diverter etc.) can be connected to the smart controller by plugging into the RJ-45 ports labelled 'zoneBUS'.

For specific installation instructions on devices other than the gauge, please refer to the installation manual included with that device.

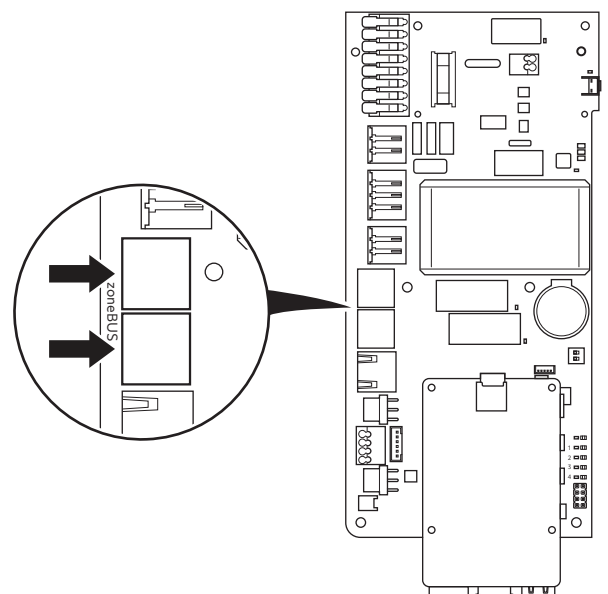


Fig. 25

## 14.0 Commissioning

### 14.3 Power and check status

Check status LEDs on the controller PCB. If any fault codes are lit, refer to the 'Fault code table' on page 34. Allow for 5 minutes of on time to ensure any pending firmware updates are completed before turning the controller off.

**When the smart controller is first turned on, fault code 1 may appear for a short duration during the controller's boot sequence.**

**If fault code 2 is present (firmware update in progress), do not switch the controller off.**

| LED label | Location | Ideal state      | Description                                                  |
|-----------|----------|------------------|--------------------------------------------------------------|
| RELAY ON  | 1        | ON (Green)/OFF   | Indicates an indirect call for heat is active                |
| STAT      | 2        | OFF              | Indicates indirect stat has tripped, press button to reset   |
| PWR ON    | 3        | ON (Green)       | Indicates all power rails good on the control board          |
| RELAY ON  | 4        | ON (Green)/OFF   | Indicates immersion output set to 'HEATER2'                  |
| RELAY ON  | 5        | ON (Green)/OFF   | Indicates immersion output on for either HEATER1 or HEATER 2 |
| COM       | 6        | Flashing (Green) | Indicates communication between SBC and controller           |
| FAULT     | 7        | OFF              | Refer to "Fault code table" on page 34                       |

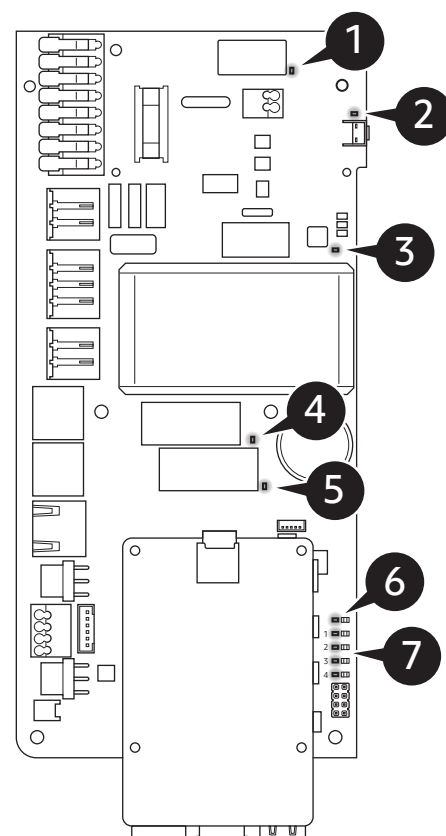


Fig. 26

## 14.0 Commissioning

### 14.4 Changing heat sources

All Mixergy systems leave the factory in direct (electric) operation. In the case of a heat pump or indirect (boiler) installation, the cylinder's primary heat source must be switched to their relevant setting to allow for operation of the 2 port valve and boiler or heat pump.

During commissioning, the primary heat source can be set by holding the boost UP and DOWN buttons simultaneously (1). The display will illuminate white to acknowledge that you have entered this mode. To change the heat source, let go of the buttons once any of the display LEDs have changed to the required colour (BLUE for direct, RED for indirect, GREEN for heat pump). The display will then flash either blue, red or green to indicate the new default heat source (2). Switch the cylinder off and on (power cycle) for the change to take effect.

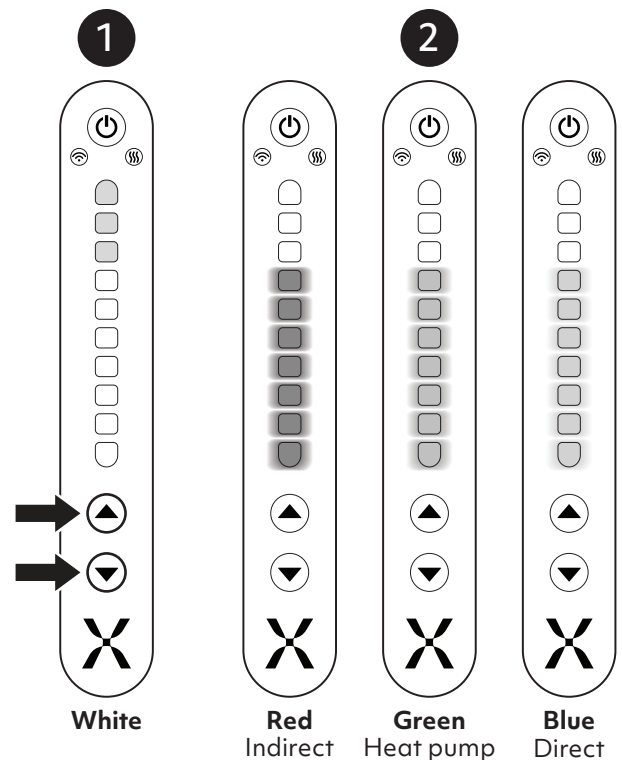


Fig. 27

**Please note that any heat source that is set while the cylinder is offline will be overwritten once the cylinder establishes an internet connection, please ensure that the default heat source is set correctly on the app once the system is fully connected.**

### 14.5 Self-test troubleshooting

#### Sensor

If any of the 4 sensor results (bottom, charge, top and feedback) show a red LED, double check that the 'CYL SENSOR' is correctly plugged in and the cylinder is within a safe temperature range (between 5 °C and 65 °C.) Try unplugging and plugging the sensor. If the problem persists.

#### Mains measurement

Double check the incoming supply connection. If the fault persists.

#### Pump

Check that the cylinder's circulator pump cable is plugged into the 'PUMP 1' header. Check the pump is correctly plugged into the pump cable extension. If the problem persists.

#### Immersion heater

Check that the cylinder's immersion heater is plugged into the 'HEATER 1' header. Check that the immersion thermostat is set to the maximum value. Ensure the cylinder is not overheated (>65 °C.) If a PV diverter is fitted, ensure it is plugged into the zoneBUS network of the controller. If the diverter has not been factory fitted, 'device discovery' may need to be run via the app in order to configure the PV diverter. If the problem persists.

#### Remote control, Indirect on/off

Check that a blue LED is shown. If a remote control signal is present, the remote control LED should light green. If any of these faults persist, go to [support.mixergy.co.uk](https://support.mixergy.co.uk)

### 14.6 Replace lid

Once commissioning is complete, power off the controller, replace the lid and switch the controller back on.

## 14.0 Commissioning

### 14.7 Commissioning checklist

This Commissioning Checklist is to be completed in full (either in this booklet or on the side of the cylinder) by the competent person who commissioned the cylinder as a means of demonstrating compliance with the appropriate Building Regulations.

Failure to install and commission this equipment to the manufacturer's instructions may invalidate the warranty but does not affect statutory rights.

**Please ensure all information is filled in correctly below.**

|                                  |  |                    |  |
|----------------------------------|--|--------------------|--|
| Customer name:                   |  | Telephone No:      |  |
| Address:                         |  |                    |  |
| Cylinder model:                  |  |                    |  |
| Cylinder serial no:              |  | Date:              |  |
| Commissioned by:<br>(Print name) |  | G3 Certificate No: |  |
| Company name:                    |  | Telephone No:      |  |
| Company address:                 |  |                    |  |

#### ALL SYSTEMS

|                                                                                                     |     |  |    |     |
|-----------------------------------------------------------------------------------------------------|-----|--|----|-----|
| What is the incoming static cold-water pressure at the inlet to the system?                         |     |  |    | bar |
| Has the strainer been cleaned of installation debris?                                               | Yes |  | No |     |
| Is the installation in a hard water area (above 200ppm)?                                            | Yes |  | No |     |
| If yes, has a scale reducer been fitted?                                                            | Yes |  | No |     |
| What type of scale reducer has been fitted?                                                         |     |  |    |     |
| What is the hot water temperature set to?                                                           |     |  |    | °C  |
| What is the maximum hot water flow rate (measured at high flow outlet)?                             |     |  |    | min |
| Time & temperature controls have been fitted in compliance with Part L of the Building Regulations? | Yes |  |    |     |
| Is the cylinder renewable compatible?                                                               | Yes |  | No |     |
| What is the hot water temperature at the nearest outlet?                                            |     |  |    | °C  |
| All appropriate pipes have been lagged up to 1m or at the point they become concealed?              | Yes |  |    |     |

## 14.0 Commissioning

### UNVENTED SYSTEMS ONLY

|                                                                                                           |     |  |    |  |
|-----------------------------------------------------------------------------------------------------------|-----|--|----|--|
| Where is the pressure reducing valve located?                                                             |     |  |    |  |
| What is the pressure reducing valve setting?                                                              | Bar |  |    |  |
| Has a combined temperature & pressure relief valve and expansion valve been fitted, and discharge tested? | Yes |  | No |  |
| The tundish & discharge pipework have been connected and terminated to Part G Building Regulations?       | Yes |  | No |  |
| Are all energy sources fitted with a cut-out device?                                                      | Yes |  | No |  |
| Has the expansion vessel been checked?                                                                    | Yes |  | No |  |

### ALL INSTALLATIONS

|                                                                                                     |     |  |
|-----------------------------------------------------------------------------------------------------|-----|--|
| The hot water system complies with the appropriate Building Regulations                             | Yes |  |
| The system has been installed in accordance with the manufacturer's instructions                    | Yes |  |
| The system has been commissioned in accordance with the manufacturer's instructions                 | Yes |  |
| The system controls have been demonstrated to and understood by the customer                        | Yes |  |
| The cylinder is ready to be connected to the internet and account registered                        | Yes |  |
| The manufacturer's literature has been explained and left with the customer                         | Yes |  |
| Building Regulations Notification Number (if applicable)                                            |     |  |
| To be completed by the customer on receipt of a Building Compliance Certificate*                    |     |  |
| Commissioning Engineer's Signature                                                                  |     |  |
| Customer's signature (to confirm satisfactory demonstration & receipt of manufacturer's literature) |     |  |

- \* All installations in England and Wales must be notified to Local Authority Building Control (LABC) either directly or through a Competent Persons Scheme. A Building Regulation Compliance Certificate will then be issued to the customer.

## 15.0 Problem solving



**Discharge from either of the relief valves indicates a malfunction in the system and must be investigated immediately.**

### 15.1 Overheated water

In the unlikely event of overheated (95°C) water being discharged, the Mixergy controller should be switched off immediately and a competent engineer called out. Please contact your original installer or contact Mixergy directly if your product is under warranty.



**Do not shut off the cold water supply to the unit.**

### 15.2 Water discharge

If water is occasionally being discharged during heating, this likely indicates that the Expansion Vessel needs to be recharged. In the event of this occurring, switch off all power supplies to the cylinder, and re-charge the vessel. If water is continually being discharged, firstly check with a gauge that the pressure allowed through the PRV does not exceed 3 bar. Should a replacement be required then only one supplied by Mixergy should be used.

### 15.3 Electrical fault


If an electrical fault of the controller is suspected or the electrical system does not operate as expected, please visit [support.mixergy.co.uk](http://support.mixergy.co.uk) for further guidance.

### 15.4 Connectivity issues

If a connectivity issue is suspected, please visit [support.mixergy.co.uk](http://support.mixergy.co.uk) for further guidance.

### 15.5 Expansion vessel check and re-charging

Check pressure via the Schrader valve on top of the vessel which is situated under the removable plastic cap. The vessel can be checked and recharged by switching off the stopcock or isolating the water supply to the cylinder, then opening a hot tap to deplete the pressure inside the cylinder. Unscrew the black plastic cap on the expansion vessel to reveal the Schrader valve, with the aid of a pressure gauge ensure the pressure reads 3.0 bar. If there is insufficient pressure within the vessel, top up the vessel via a pump and recharge to 3.0 bar.

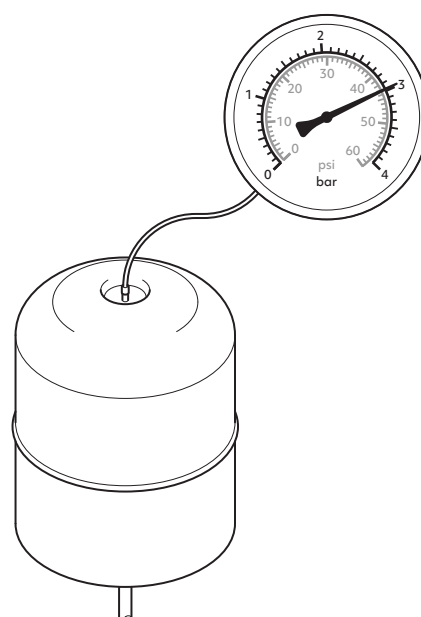

**Fig. 28**

### 15.6 Safety valves

If all previous checks have been done and water is still being discharged from either safety valve, determined which valve is faulty and replace with one supplied by Mixergy.

## 15.0 Problem solving

### 15.7 Fault code table



**Do not switch off power to the system if a firmware upgrade (code 2) is in progress.**

| LED code |   |   |   | Fault code | Fault description          | Fault condition                                      |
|----------|---|---|---|------------|----------------------------|------------------------------------------------------|
| 1        | 2 | 3 | 4 |            |                            |                                                      |
|          |   |   |   | 1          | No comms from SBC          | No comms received by cylinder MCU for >2 seconds     |
|          |   |   |   | 2          | Firmware update active     | Firmware update currently in progress                |
|          |   |   |   | 3          | Cylinder sensor problem    | Any thermocline sensor readings out of bounds        |
|          |   |   |   | 4          | Energy measurement issue   | Unable to get energy readings from chip              |
|          |   |   |   | 5          | Heater 1 issue             | Energy flow out of bounds when heater 1 is turned on |
|          |   |   |   | 6          | Heater 2 issue             | Energy flow out of bounds when heater 2 is turned on |
|          |   |   |   | 7          | PV diverter not responding | No comms from PV diverter for >2 seconds             |
|          |   |   |   | 8          | Current sensor problem     | No comms from EMC/ Current interface                 |
|          |   |   |   | 9          | Ambient sensor issue       | Ambient sensor reading out of bounds                 |
|          |   |   |   | 10         | S1 issue                   | Sensor1 reading out of bounds                        |
|          |   |   |   | 11         | S2 issue                   | Sensor2 reading out of bounds                        |
|          |   |   |   | 12         | Pump1 issue                | Energy flow out of bounds when pump1 is turned on    |
|          |   |   |   | 13         | Pump2 issue                | Energy flow out of bounds when pump2 is turned on    |
|          |   |   |   | 14         | Reserved                   |                                                      |
|          |   |   |   | 15         | Reserved                   |                                                      |

Faults highlighted in grey are configuration specific and do not apply to standard direct/indirect systems. If you are unable to rectify any fault yourself, please contact Mixergy directly and quote the fault code on the table above.

## 15.0 Problem solving

### 15.8 No PWR ON LED

If the PWR ON LED is not lit, this indicates an issue with the unit's power supply. Double check the incoming supply & check fuse F1 for continuity. If the fuse has failed, it is recommended to first disconnect and check the immersion heater(s) for faults before replacing the fuse.

### 15.9 STAT LED on/stuck on

If the STAT LED is solid red, this indicates a fault condition with the electronic thermostat. If the cylinder is in a safe condition ( $<70^{\circ}\text{C}$ ), press the stat reset button on the right side of the controller. If the issue persists, double check the cylinder sensor is plugged in properly. If the installation is indirect, check that the cylinder 2-port valve is free to move and not stuck in the open position.

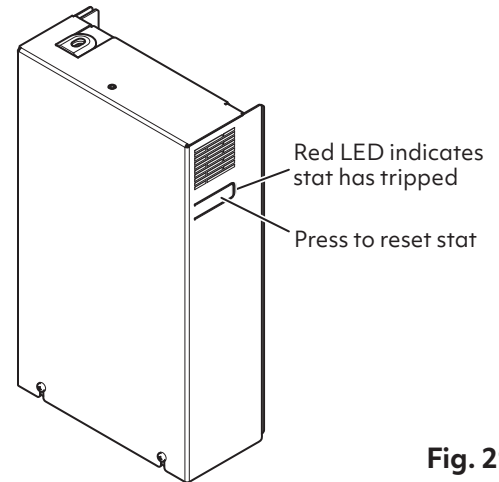


Fig. 29

## 16.0 Draining the cylinder

1. Switch off the immersion heater(s), boiler and any other heat sources.
2. Switch off water at mains.
3. Open nearest hot tap.
4. Open drain to start draining the cylinder.

To re-fill follow the commissioning instructions.

### 16.1 Flushing the cylinder

To flush out the system, drain the unit as above, fill and repeat.

If after recharging the expansion vessel the cylinder is still discharging, it may be due to cross-flow - ensure appropriate check valves are fitted. The pressure reducing valve, one of the relief valves, or the expansion vessel may have failed. The component should be identified and replaced by one supplied by Mixergy.

## 17.0 Replacement parts

**Do not attempt to repair or replace any parts of the Mixergy cylinder unless you are a trained operative. If you suspect a fault or a replacement part is needed, please visit: [support.mixergy.co.uk](https://support.mixergy.co.uk)**

To determine the correct parts for your system, please ensure you have your cylinder MX number which can be found on the nameplate located at the front of the cylinder.





|                           |                            |
|---------------------------|----------------------------|
| Model code                | MX-180-ELE-EXT-550-1-1-A   |
| Total weight              | 227 kg (wet), 54 kg (dry)  |
| Immersion heater rating   | 230-240 V~ 2.7-3.0 kW      |
| Immersion heater type     | 1 3/4" BSP - 400mm Incoloy |
| Standing heat loss/24 hr  | 1.8 kWh                    |
| Heat exchanger rating     | -- kW                      |
| Max. supply pressure      | 1 MPa (10 bar)             |
| Expansion relief pressure | 0.6 MPa (6 bar)            |
| Max. operating pressure   | 0.55 MPa (5.5 bar)         |
| Max. coil pressure        | 0.35 MPa (3.3 bar)         |

|                                                                                                                                  |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>MX000000</b>                                                                                                                  |  |
| Scan the QR code to add your tank to your account or visit <a href="https://www.mixergy.io/register">www.mixergy.io/register</a> |                                                                                       |
| mixdevice-aaaaa-bbbbb-ccccc-ddddd-eeee                                                                                           |                                                                                       |

Fig. 30

## 17.0 Replacement parts

| Part description                                                                                 | Part number |
|--------------------------------------------------------------------------------------------------|-------------|
| Immersion stat  | MEL0018     |
| Pump assembly   | MAS0265     |
| Controller     | MAS0191     |
| Gauge         | MAS0043     |
| 2-port valve  | MEL0023     |

## 18.0 Guide to safe isolation

A Mixergy cylinder may have more than one incoming main electrical supply and point of isolation.

All of which must be “Proven Dead” before commencing work.

Primary supply: 16A MCB protected circuit with a 20A DP switch

Indirect control: 3A fuse spur

Timer control: 3A or 13A fuse spur

All of which must be isolated and locked-off before testing.

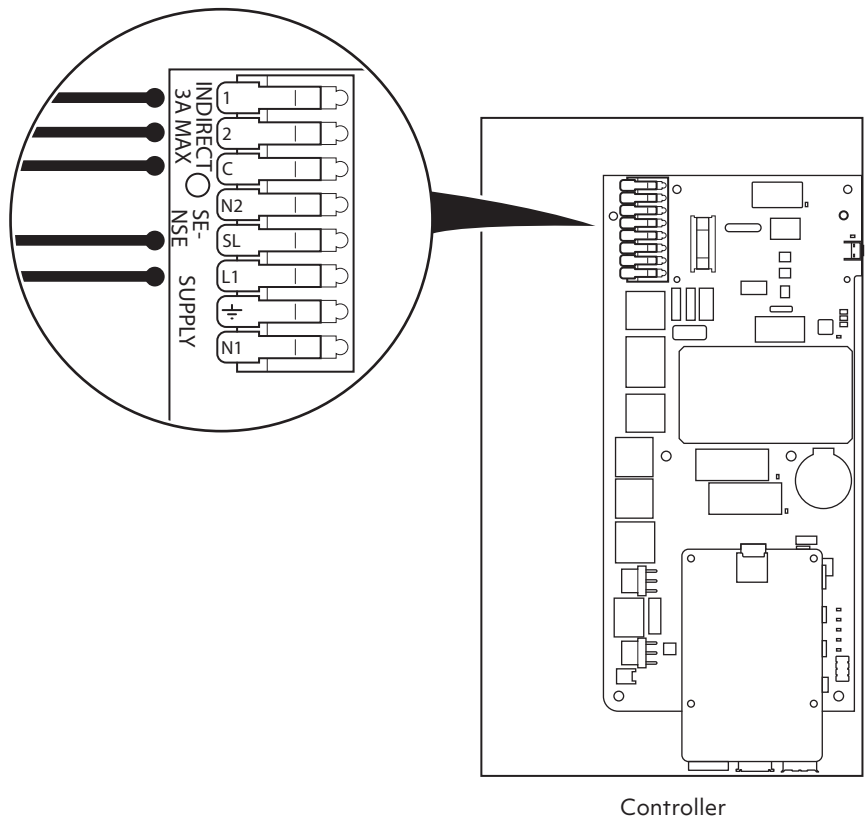


Fig. 31

**For more information on safe isolation see [www.electricalsafetyfirst.org.uk](http://www.electricalsafetyfirst.org.uk) and search best practice.**

## 19.0 Servicing and maintenance

ANNUAL MAINTENANCE should be performed by a competent operative.

A maintenance record should be kept on the service record on page 35 of this booklet.

### 19.1 Annual service checks

- **Expansion relief valve** - manually open the twist cap and check that the water is discharged and runs clearly through the Tundish and out at the final discharge point. Ensure that the valve re-seats/re-seals itself.
- **Pressure & temperature relief valve** - repeat the above procedure. Ensure that the valve re-seats/re-seals itself.
- **Strainer** - turn off mains at stopcock. There will be a small amount of residual water in the pipework, remove the cartridge from Pressure Reducing Valve, clean Strainer and replace.
- **Expansion vessel** - check pressure via the valve on top of the vessel which is located under the plastic cap. Ensure pressure is 3 Bar. Vessel can be recharged if required as per 'Expansion vessel check and re-charging' on page 33.

### 19.2 Disassociating an account

If a new user is moving into the property and the user of the account tied to the cylinder needs to be changed, the new user will have to disassociate the cylinder from the existing account before registering. This can be performed by pressing and holding the boost down and power buttons for approximately 15 seconds. For more information go to [support.mixergy.co.uk](http://support.mixergy.co.uk).




Fig. 32

## 20.0 Service Record

It is recommended that your hot water system is serviced regularly and that the appropriate service record is completed.

Before completing the service record below, please ensure you have completed the service in accordance with the manufacturer's instructions.

| Service No.1  | Date |  | Service No.2  | Date |  |
|---------------|------|--|---------------|------|--|
| Engineer name |      |  | Engineer name |      |  |
| Company name  |      |  | Company name  |      |  |
| Telephone No. |      |  | Telephone No. |      |  |
| Email address |      |  | Email address |      |  |
| Comments      |      |  | Comments      |      |  |
|               |      |  |               |      |  |
| Signature     |      |  | Signature     |      |  |
| Service No.3  | Date |  | Service No.4  | Date |  |
| Engineer name |      |  | Engineer name |      |  |
| Company name  |      |  | Company name  |      |  |
| Telephone No. |      |  | Telephone No. |      |  |
| Email address |      |  | Email address |      |  |
| Comments      |      |  | Comments      |      |  |
|               |      |  |               |      |  |
| Signature     |      |  | Signature     |      |  |

## 20.0 Service Record

|                     |      |  |                      |      |  |
|---------------------|------|--|----------------------|------|--|
| <b>Service No.5</b> | Date |  | <b>Service No.6</b>  | Date |  |
| Engineer name       |      |  | Engineer name        |      |  |
| Company name        |      |  | Company name         |      |  |
| Telephone No.       |      |  | Telephone No.        |      |  |
| Email address       |      |  | Email address        |      |  |
| Comments            |      |  | Comments             |      |  |
|                     |      |  |                      |      |  |
| Signature           |      |  | Signature            |      |  |
| <b>Service No.7</b> | Date |  | <b>Service No.8</b>  | Date |  |
| Engineer name       |      |  | Engineer name        |      |  |
| Company name        |      |  | Company name         |      |  |
| Telephone No.       |      |  | Telephone No.        |      |  |
| Email address       |      |  | Email address        |      |  |
| Comments            |      |  | Comments             |      |  |
|                     |      |  |                      |      |  |
| Signature           |      |  | Signature            |      |  |
| <b>Service No.9</b> | Date |  | <b>Service No.10</b> | Date |  |
| Engineer name       |      |  | Engineer name        |      |  |
| Company name        |      |  | Company name         |      |  |
| Telephone No.       |      |  | Telephone No.        |      |  |
| Email address       |      |  | Email address        |      |  |
| Comments            |      |  | Comments             |      |  |
|                     |      |  |                      |      |  |
| Signature           |      |  | Signature            |      |  |

## 20.0 Service Record

|                      |      |  |                      |      |  |
|----------------------|------|--|----------------------|------|--|
| <b>Service No.11</b> | Date |  | <b>Service No.12</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.13</b> | Date |  | <b>Service No.14</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.15</b> | Date |  | <b>Service No.16</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |

## 20.0 Service Record

|                      |      |  |                      |      |  |
|----------------------|------|--|----------------------|------|--|
| <b>Service No.17</b> | Date |  | <b>Service No.18</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.19</b> | Date |  | <b>Service No.20</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.21</b> | Date |  | <b>Service No.22</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |

## 20.0 Service Record

|                      |      |  |                      |      |  |
|----------------------|------|--|----------------------|------|--|
| <b>Service No.23</b> | Date |  | <b>Service No.24</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.25</b> | Date |  | <b>Service No.26</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |
| <b>Service No.27</b> | Date |  | <b>Service No.28</b> | Date |  |
| Engineer name        |      |  | Engineer name        |      |  |
| Company name         |      |  | Company name         |      |  |
| Telephone No.        |      |  | Telephone No.        |      |  |
| Email address        |      |  | Email address        |      |  |
| Comments             |      |  | Comments             |      |  |
|                      |      |  |                      |      |  |
| Signature            |      |  | Signature            |      |  |





For further guidance and troubleshooting  
visit **[support.mixergy.co.uk](https://support.mixergy.co.uk)**

**mixergy**<sup>®</sup>

**[www.mixergy.co.uk](https://www.mixergy.co.uk)**

Mixergy Ltd, 2 Canal View, Wharf Farm, Eynsham  
Road, Cassington, Oxfordshire OX29 4DB

Issue 2 05/26 MDC0046-01