
## MIXERGYCUBEX

The Mixergy Cube X is a simpler and more convenient smart hot water solution for housing providers to specify for projects which can't accommodate a G3 installation.

Using Mixergy's unique 'heat what you need' smart technologies, tenants will save on their hot water bills, whilst being sure of having the hot water they need, all year round.

Where solar PV is installed, Mixergy's embedded solar diverter, available soon, can be used for hot water.

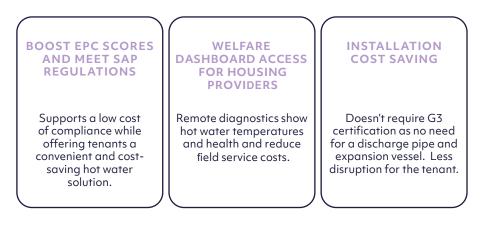

. <u>H</u> h	
	1315 - 1650 MM
	131

Product Variant	150L	210L
Width (mm)	520	520
Depth (mm)	585	585
Height (including fittings) (mm)	1315	1650
Clearance	W-50mm   D-50mm   H-475mm	W-50mm   D-50mm   H-475mm
Dry weight (kg)	36	44
Wet weight (kg)	188	246
Primary Connections	22mm comp	22mm comp
Overfill pipe connections	G ¾"	G ¾"
Electrical requirements	16A, 230-240V,1.5mm2 CSA	16A, 230-240V,1.5mm2 CSA
DHW coil max operating pressure (bar)	3	3
Primary coil pressure drop @ 15 l/min (mbar)	107	134
Maximum permissible storage water temperature (°C)	65	65
Standing Heat loss (kWh/24h)	1.12	1.24
ERP Rating	В	В

## 520 X 585 MM