


For Commissioning see Installation & Servicing instructions.
For more information visit: support.mixerly.co.uk

1.	Site cylinder and check clearances
2.	Plumbing and pipework
3.	Fit Mixerly gauge
4.	Install and connect to household wiring
5.	Make connection to router
6.	Commissioning
7.	Complete the Benchmark installation form in manual



Please read in full before starting installation and refer where necessary to main Installation & Servicing instructions.

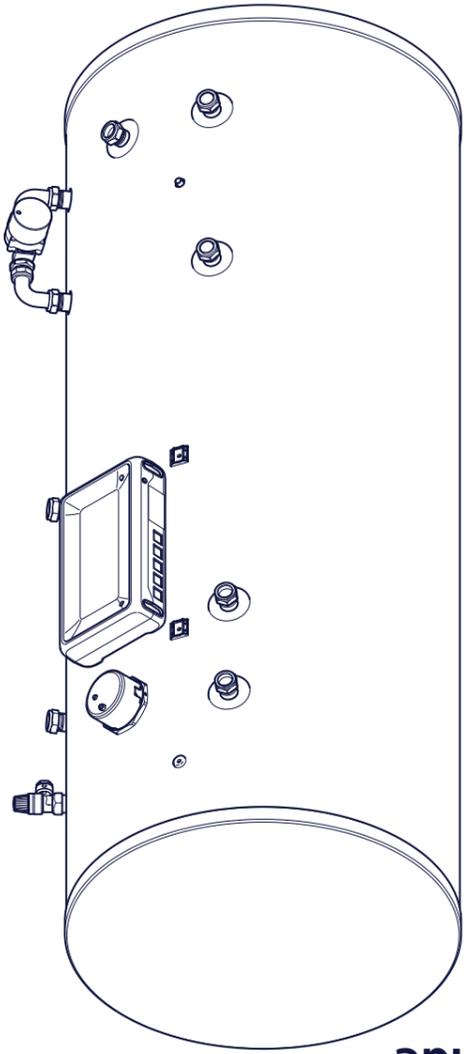


Mixerly X


For stainless steel hot water cylinders
Quick-fit Guide

5. Checklist


1. Schematics

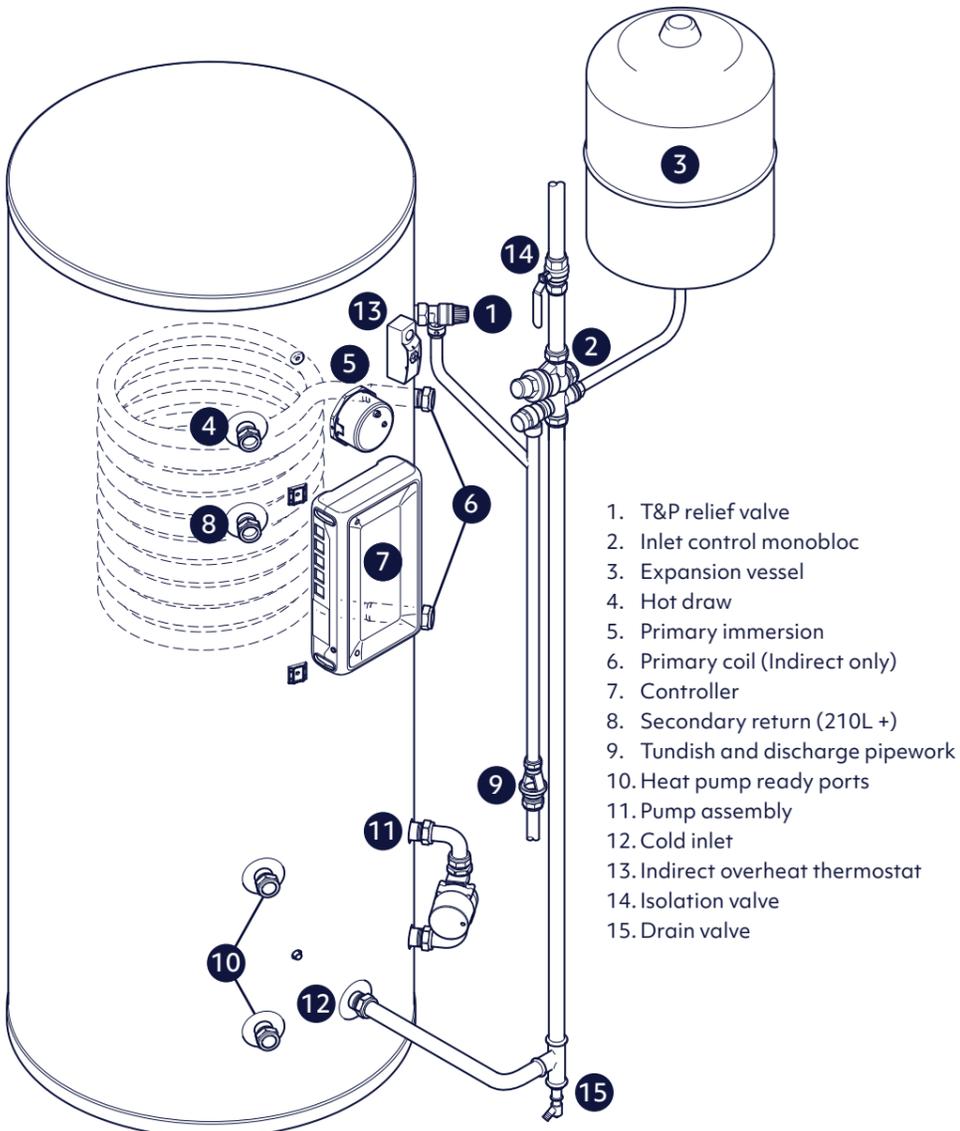

Direct unvented



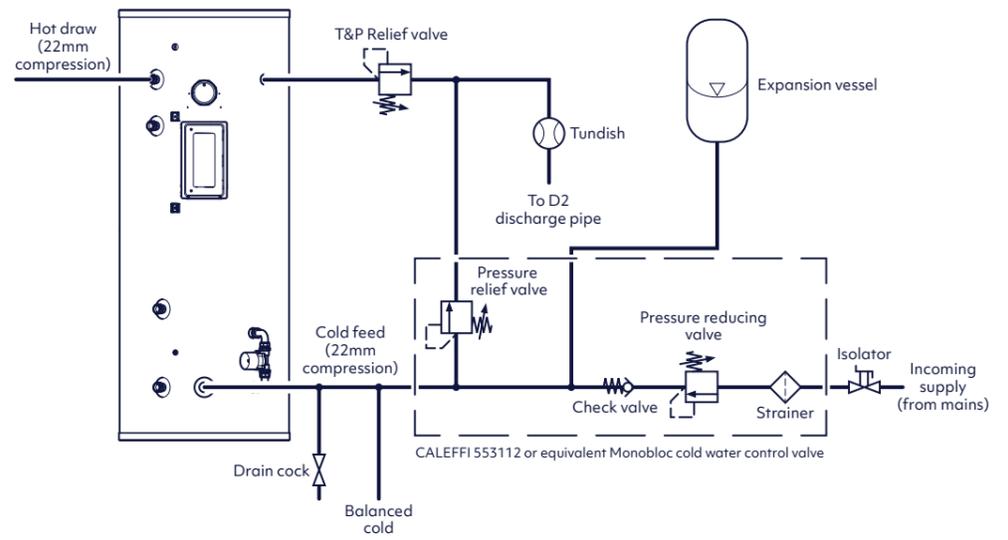


Indirect unvented

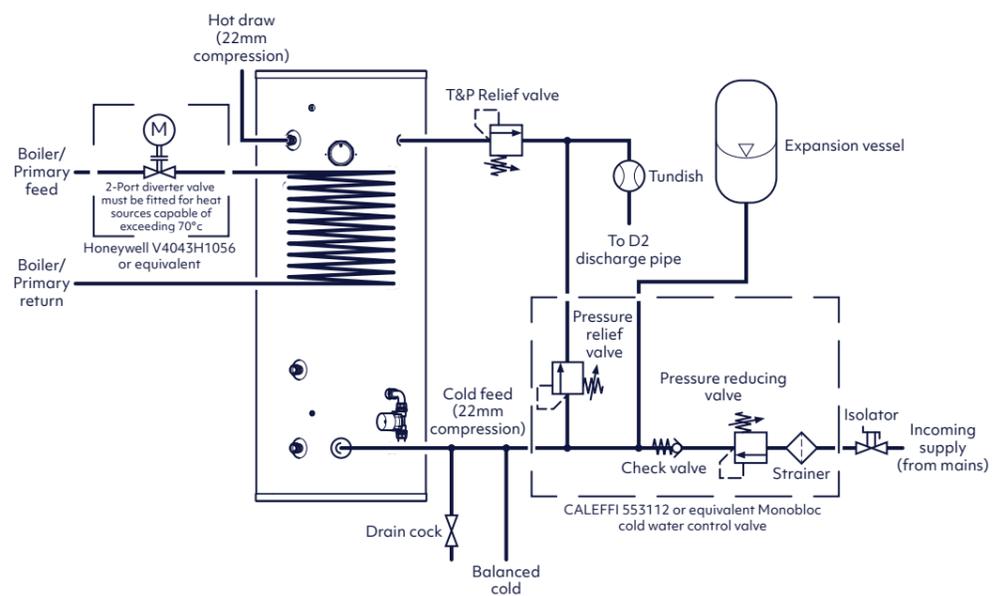

2. Installation - Plumbing



Site requirements
Ensure all clearances are met

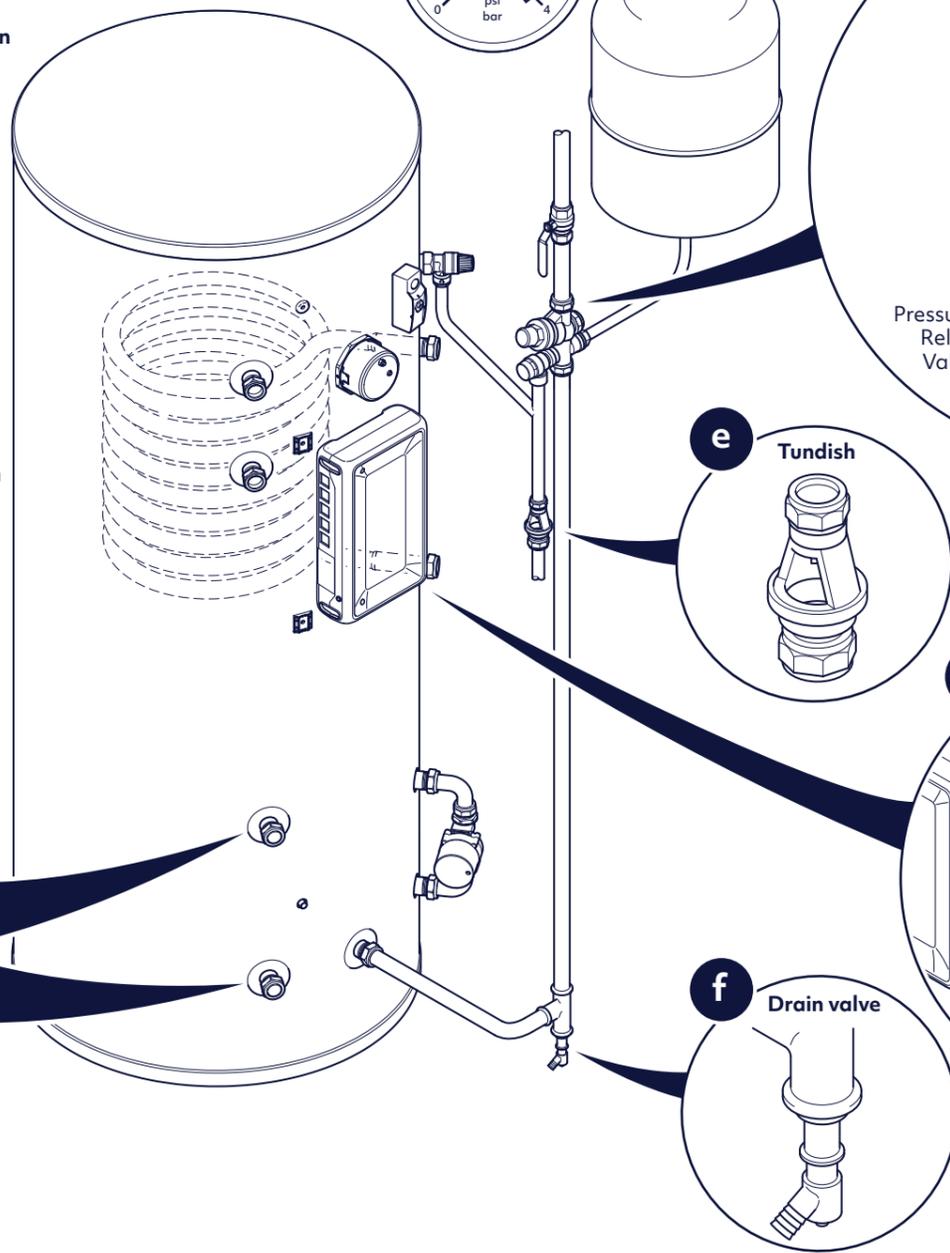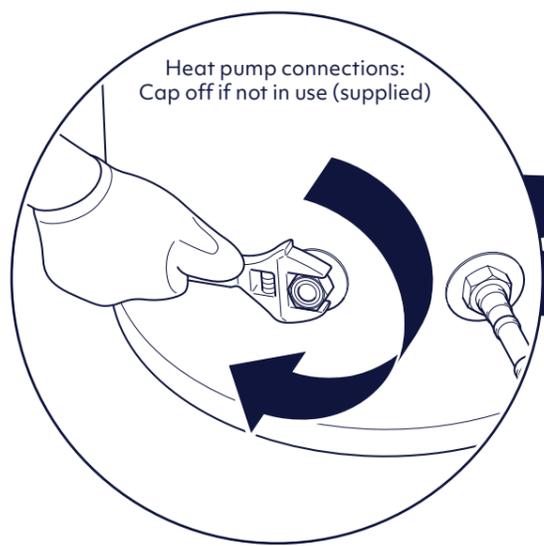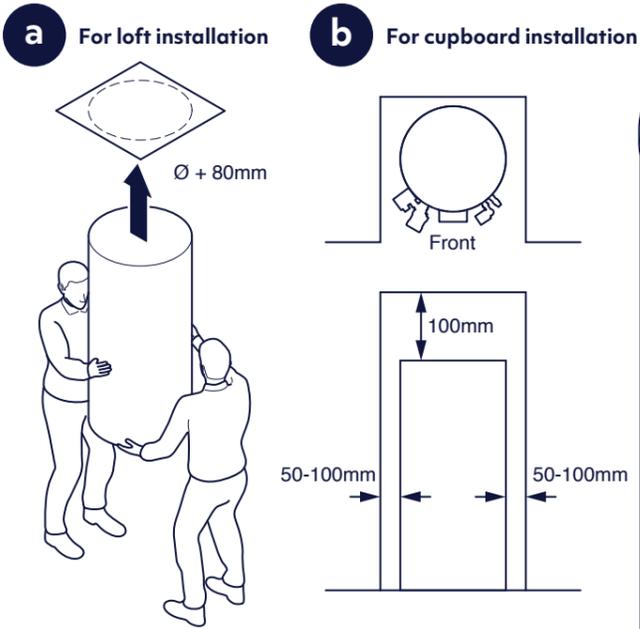

3. Installation - Wiring




20A Double pole switch

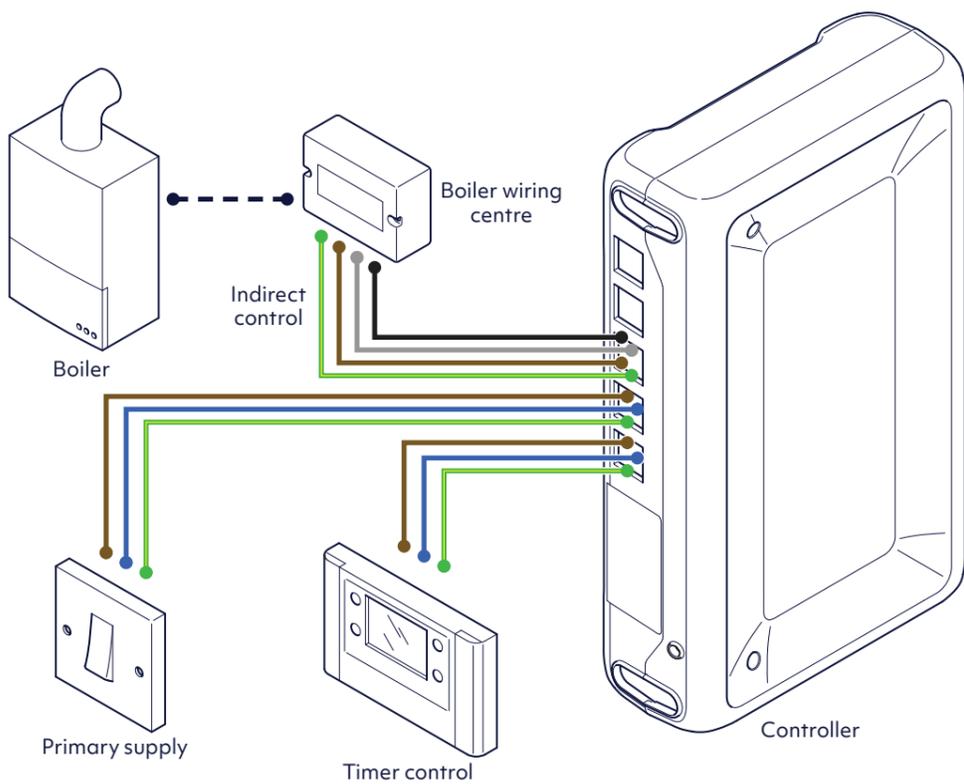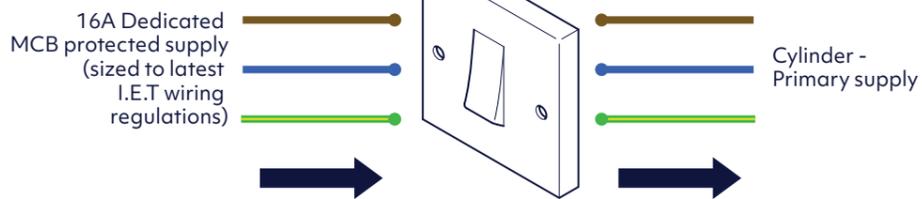

4. Connectivity

Connection to the cylinder can be made using the provided ethernet to powerline adaptor (a) or by hard-wired ethernet (b)

a Powerline connection

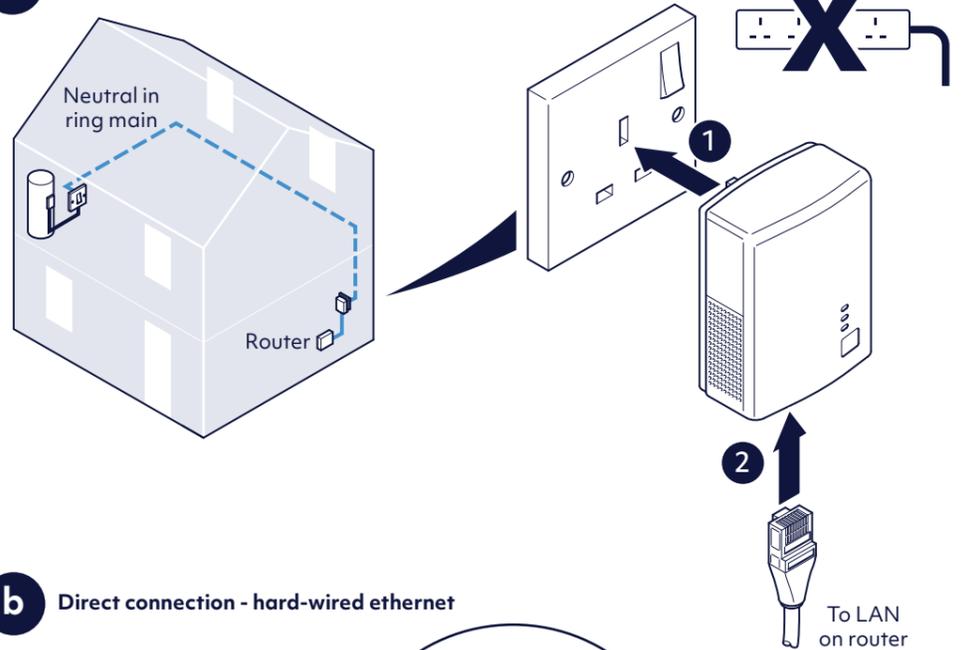

b Direct connection - hard-wired ethernet

