


For more information visit: support.mixergy.co.uk

For Commissioning see Installation & Servicing instructions.


1. Site cylinder and check clearances	
2. Plumbing and pipework	
3. Fit Mixergy gauge	
4. Install and connect to household wiring	
5. Make connection to router	
6. Commissioning	
7. Complete the Benchmark installation form in manual	

7. Checklist

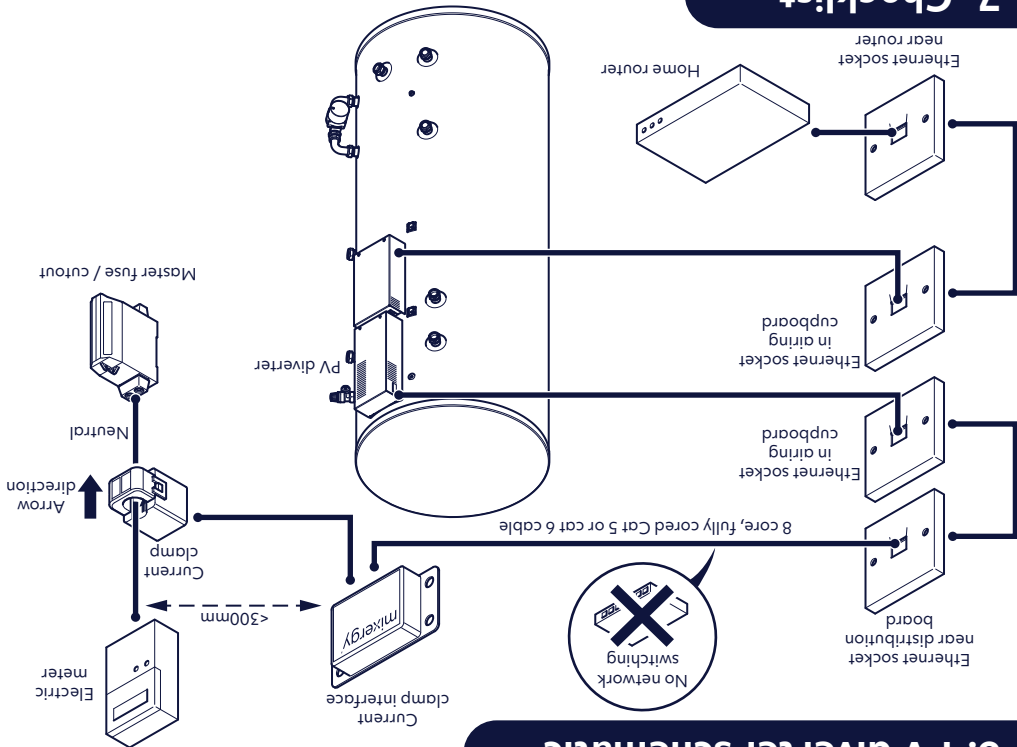


6. PV diverter schematic


Direct unvented

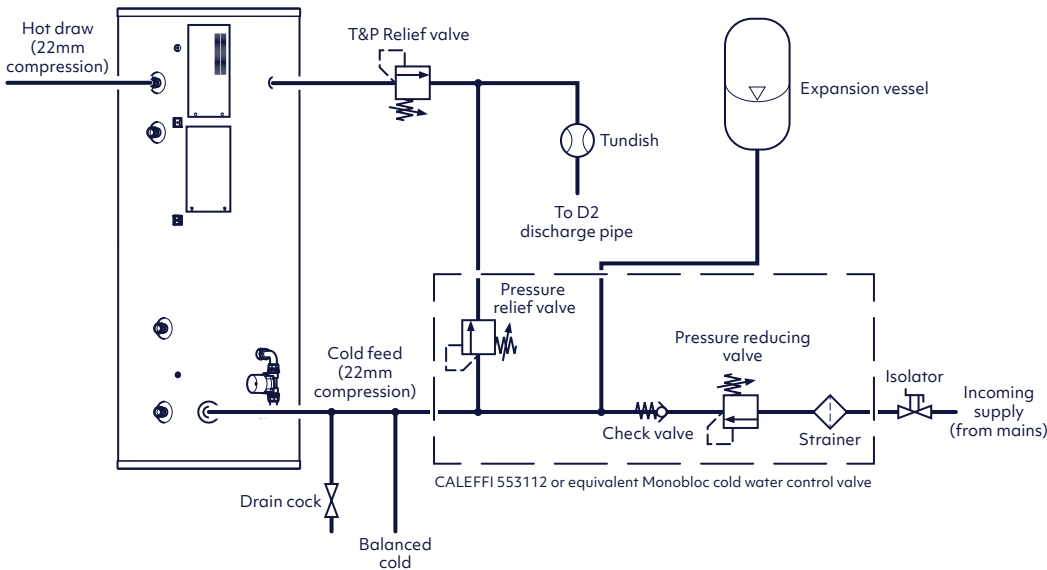

Indirect unvented

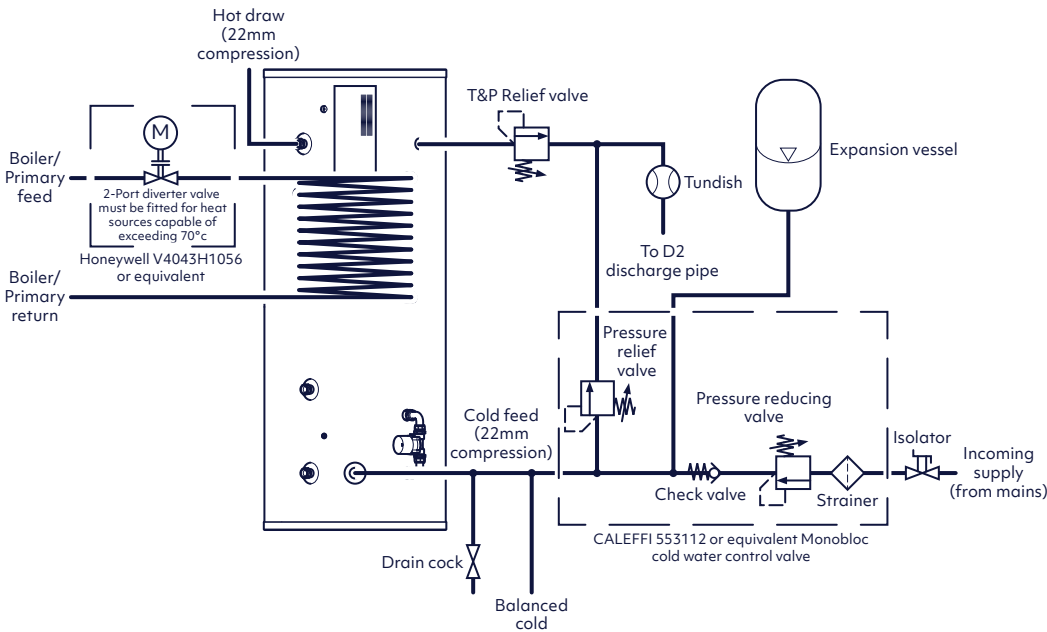


Please read in full before
starting installation and refer
where necessary to main
Installation & Servicing instructions.




Solar X

For stainless steel hot water cylinders

Quick-fit Guide

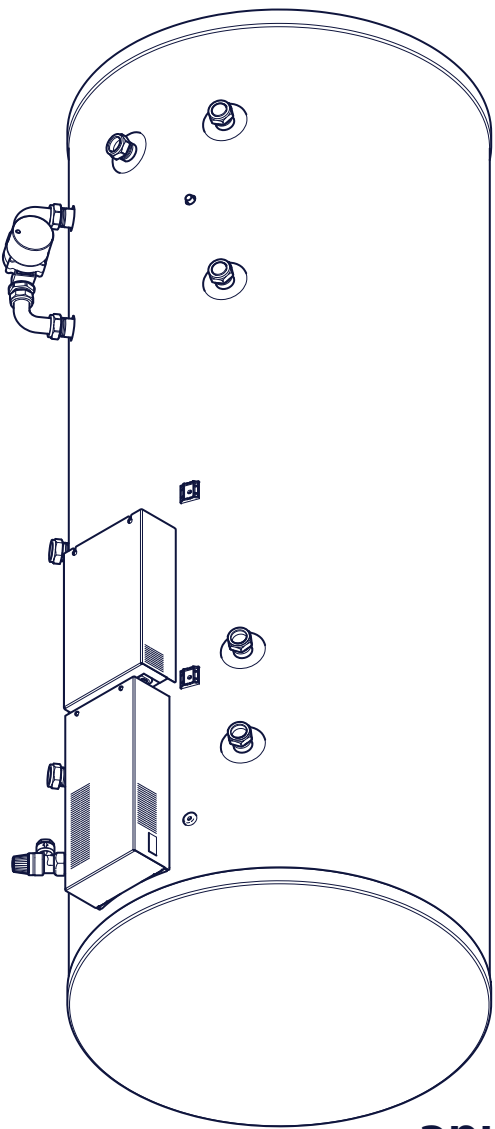

1. Schematics

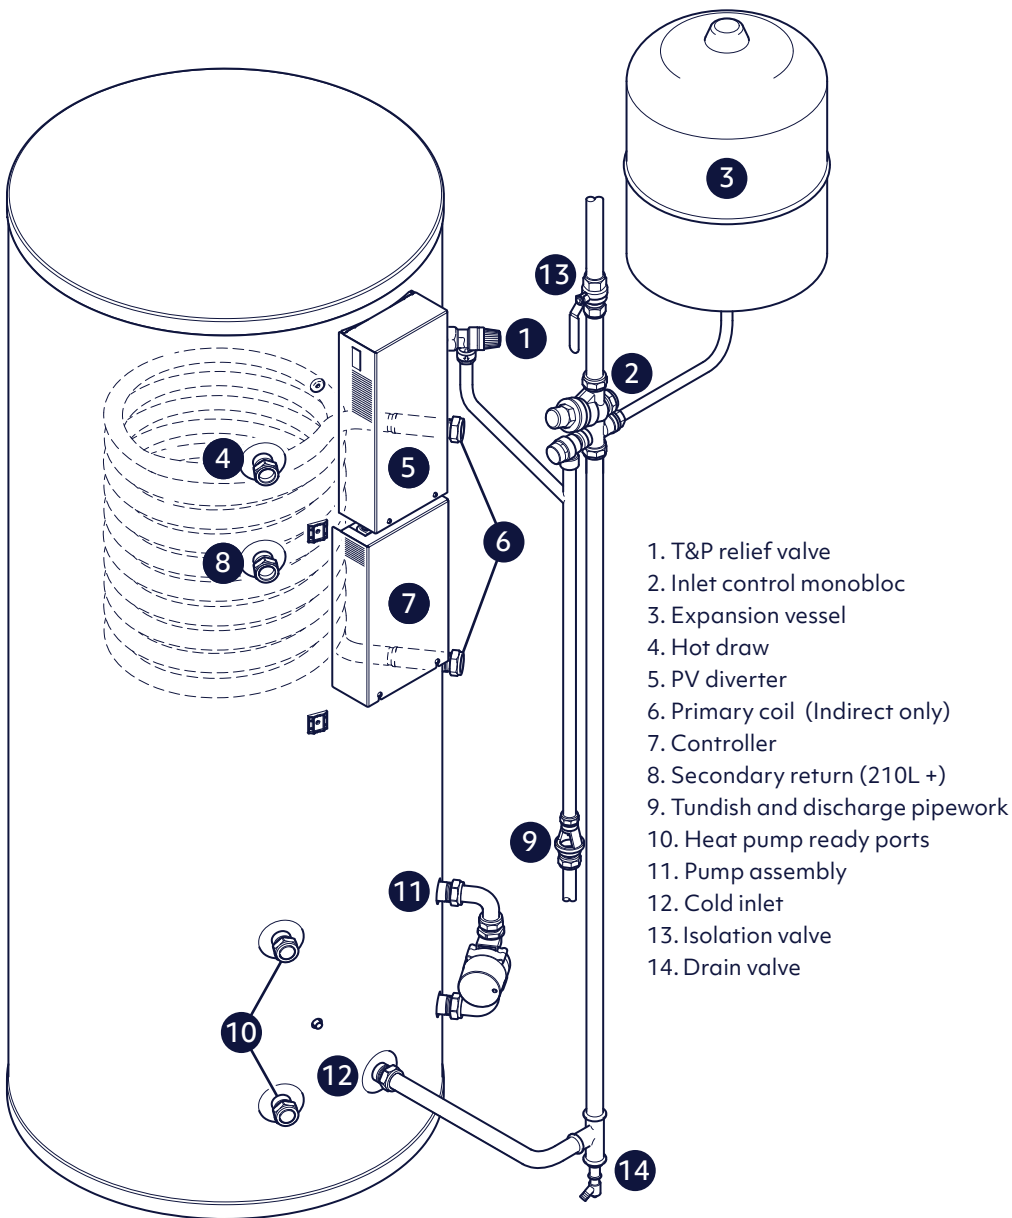


2. Installation - Plumbing




Site requirements
Ensure all clearances are met




a For loft installation

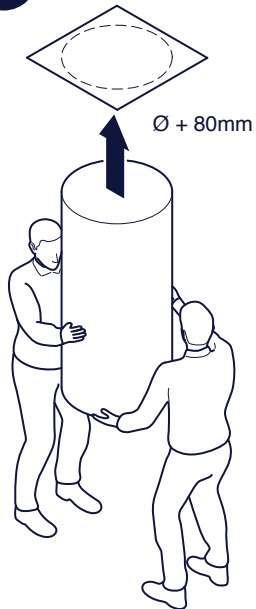


b For cupboard installation

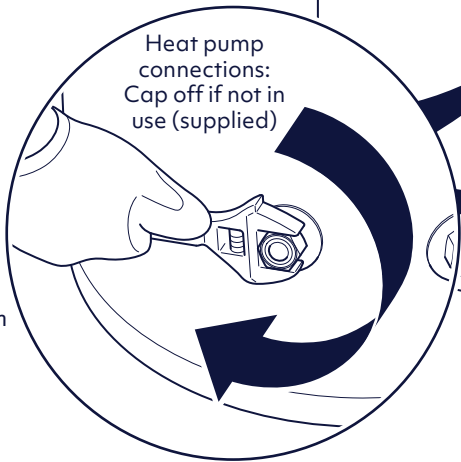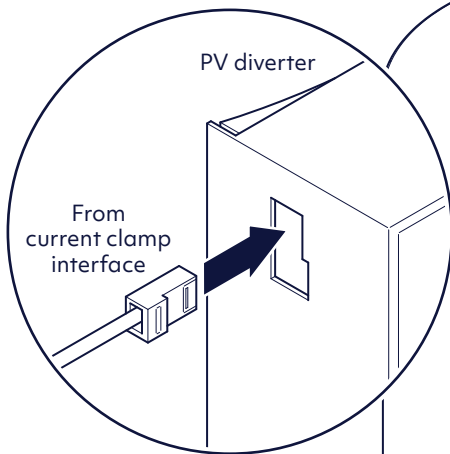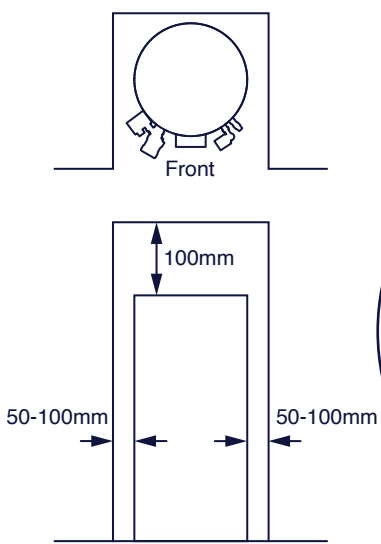


c Expansion vessel

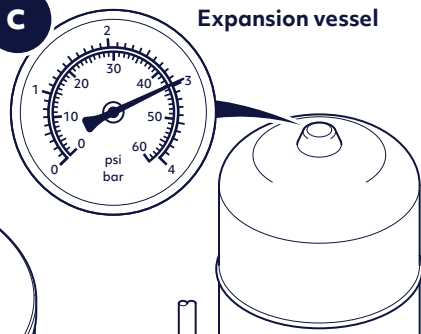


d Monobloc kit

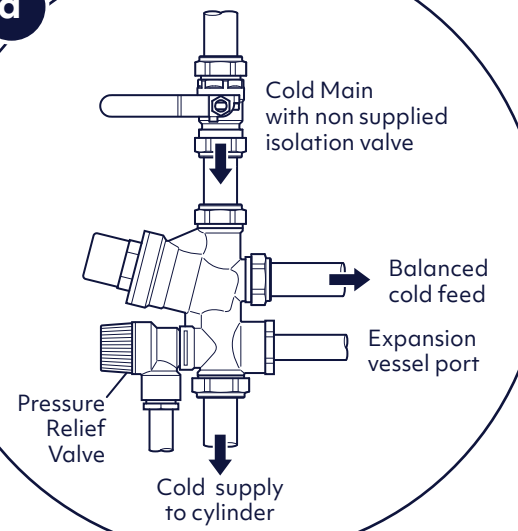


e Tundish




f Drain valve





g Self adhesive pad

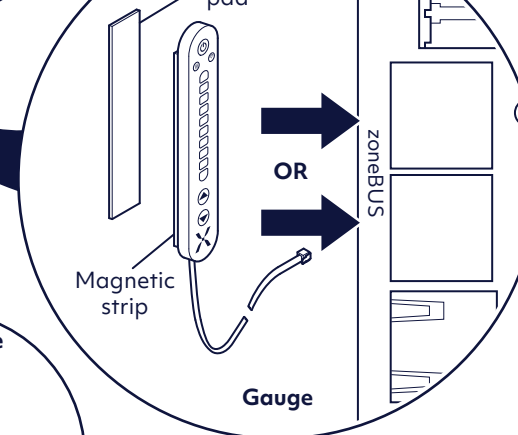

3. Installation - Wiring

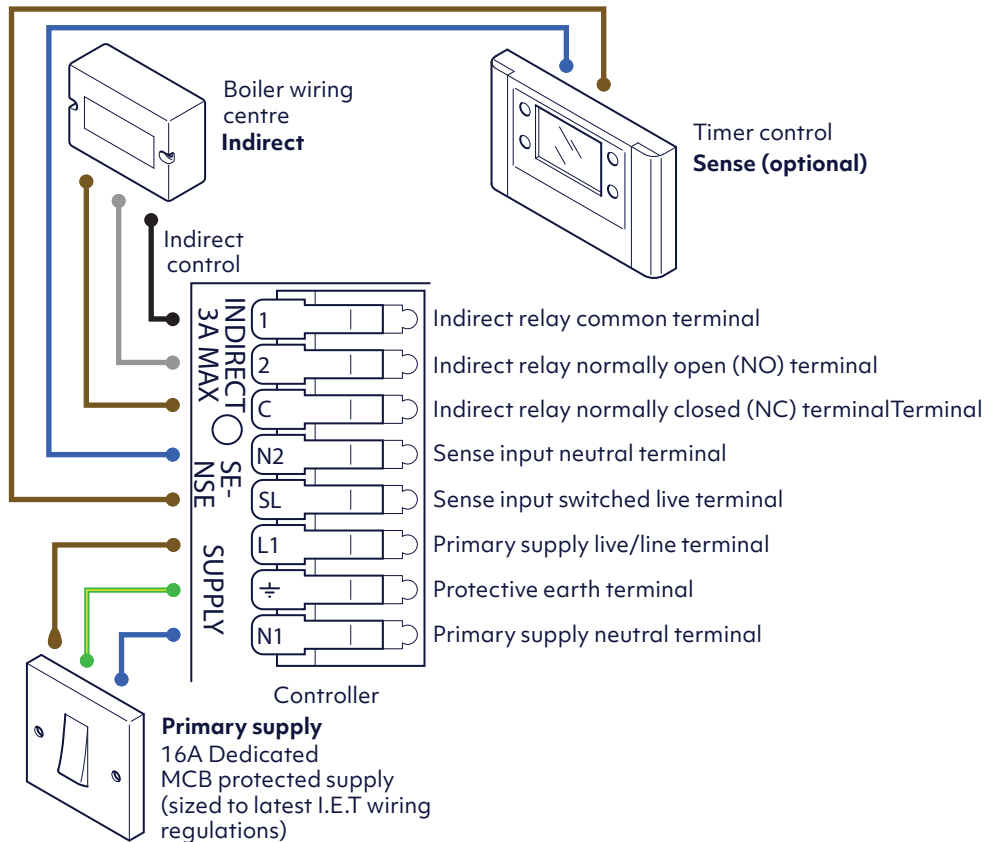

4. Installation - Current clamp


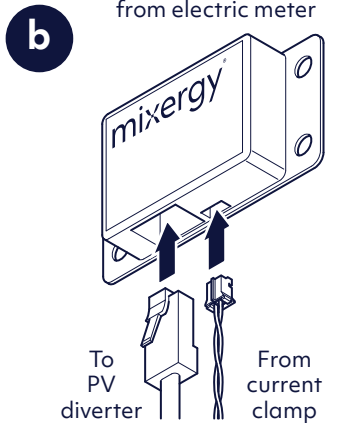
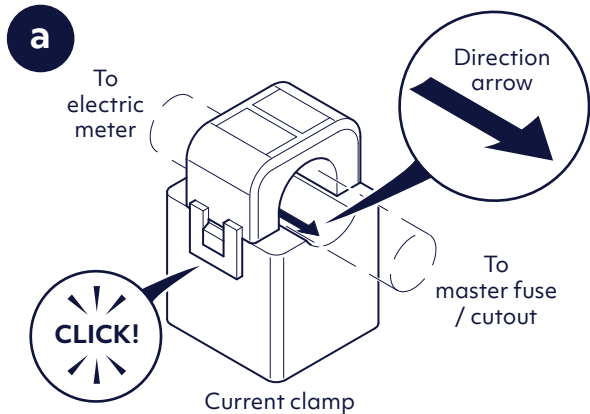


5. Connectivity



Set up for the cylinder to be connected by homeowner using the provided WIFI dongle (a) or by hard-wired ethernet (b)

a WIFI connection

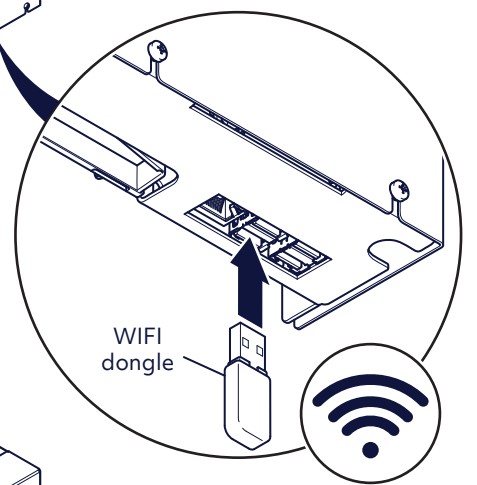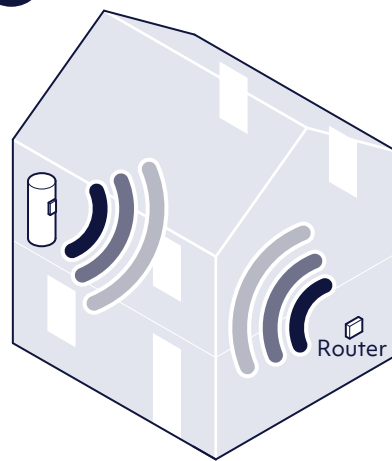

b Direct connection - hard-wired ethernet

